



## A.H. Systems, Inc.

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

## BCP-615

### RF Current Probe

10 KHz – 500 MHz

This probe is capable of measuring pulse currents up to 100 amperes.



Frequency Range: 10 KHz - 500 MHz  
Transfer Impedance: -40 to 18 (dBΩ)  
Max Cont. Current: 400 Amps DC to 60 Hz  
350 Amps at 400 Hz  
Max Power Voltage: Limited by the conductor under test.  
Peak Pulse Current: 100 Amps  
Connector: N-Type, Female

### Physical Dimensions

Aperture: 1.25" (32 mm)  
Weight: 1.2 lb.'s (0.55 kg)

### Features

- pulse currents up to 100 amperes
- Individually Calibrated (Transfer Impedance calibration included)
- Split Type Clamp-on Design
- Three Year Warranty

Conducted currents can be measured without making direct contact with the source conductor or metallic surface by means of clamp-on current probes. The BCP-615 Current Probe is designed to permit field intensity meters, spectrum analyzers, and other 50 ohm impedance instruments to measure quantitative magnitudes of current. Measurements can be made on single and multi-conductor cables, ground and bonding straps, shielded conduits and on coaxial cables. A current probe acts as a single turn primary, multiple turn secondary transformer, placing low series impedance in the probed power line or signal lead while capable of driving a usable signal into a 50ohm receiver. A current probe is characterized by its transfer impedance, ZT (dBohm) the ratio of output voltage into a standard load (usually 50ohm for EMI testing) divided by the net current traveling through the probe window area.



**A.H. Systems, Inc.**

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223  
Fax: (818) 998-6892

◆ sales@AHSystems.com  
◆ www.AHSystems.com

### Recommended Accessories

- CPF-630 Current Probe Fixture
- SAC-213 N/N Cable, 3 Meter



**A.H. Systems, inc.**  
9710 Cozycroft Ave.  
Chatsworth, CA 91311  
818.998.0223 fax 818.998.6892


sales@AHSystems.com www.AHSystems.com

Calibration, Broadband Current Probe

Model Number: BCP-615

Transfer Impedance Conversion Formula:

$$dB\mu A = dB\mu V - dB\Omega + \text{cable loss}$$

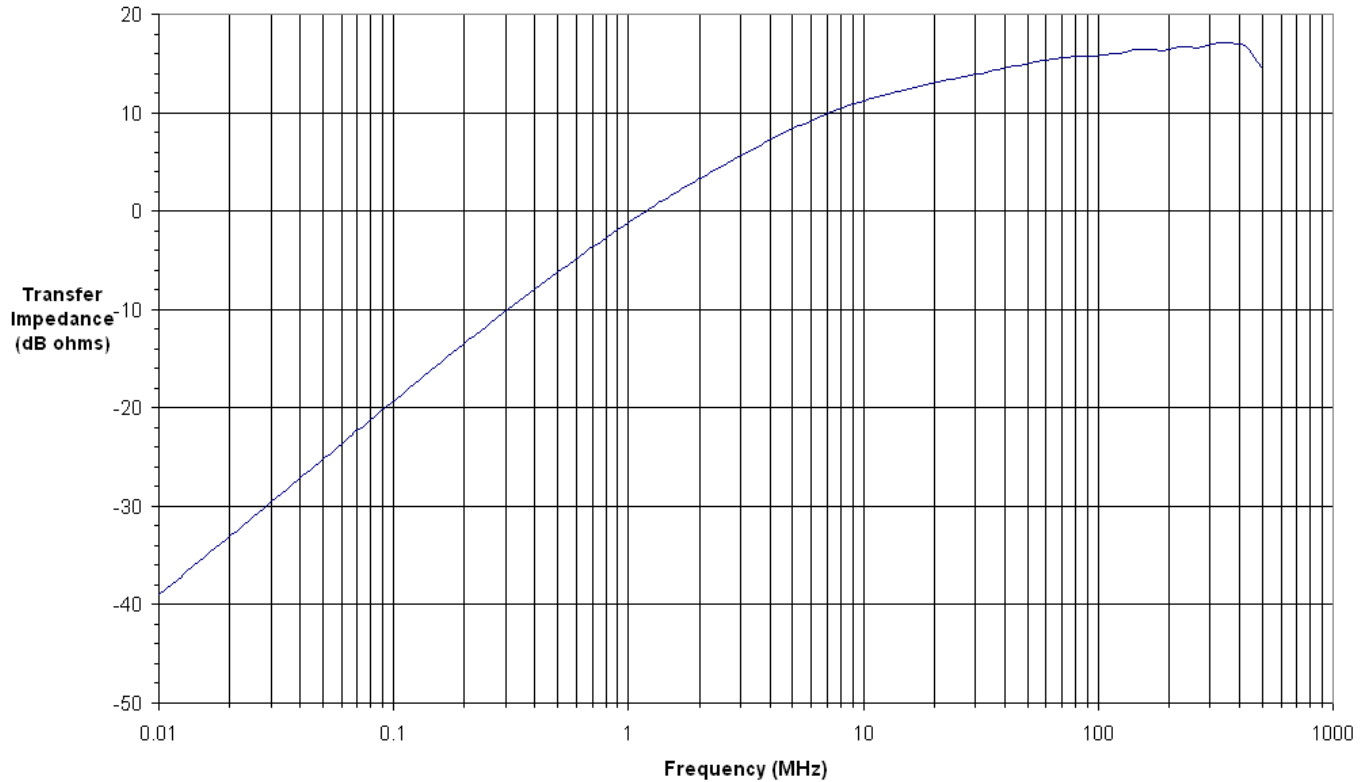



**A.H. Systems, Inc.**

9710 Cozycroft Ave.

Chatsworth, CA 91311



Tel: (818) 998-0223



[sales@AHSystems.com](mailto:sales@AHSystems.com)

Fax: (818) 998-6892



[www.AHSystems.com](http://www.AHSystems.com)

