

# Keysight N9038A

## MXE EMI Receiver

3 Hz to 3.6, 8.4, 26.5, and 44 GHz

Data Sheet



Unlocking Measurement Insights

## Table of Contents

Definitions and Conditions .....	3
Frequency and Time Specifications.....	4
Amplitude Accuracy and Range Specifications.....	7
Dynamic Range Specifications.....	11
PowerSuite Measurement Specifications.....	16
General Specifications.....	17
Inputs and Outputs.....	19
I/Q Analyzer.....	21
RTSA .....	23

### Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That’s why Keysight Technologies, Inc. created the MXE: it’s a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the MXE, and keep the test queue flowing.

## Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx.  $2\sigma$ ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the MXE EMI receiver. For the complete specifications guide, visit:

[www.keysight.com/find/mxe\\_specifications](http://www.keysight.com/find/mxe_specifications)

### Get more information

This data sheet is a summary of the specifications and conditions which are available in the MXE EMI Receiver Specification Guide (N9038-90010).

For ordering information, refer to the MXE EMI Receiver Configuration Guide (5990-7419EN).

## Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Input 1		
Option 503	3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508	3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 526	3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 544	3 Hz to 44 GHz	–
Input 2	3 Hz to 1 GHz	10 MHz to 1 GHz
Band	LO multiple (N)	
0	1	3 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17.0 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 44 GHz
Frequency reference		
Accuracy	± [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]	
Total aging	± 1 x 10 <sup>-7</sup> / year	
	± 1.5 x 10 <sup>-7</sup> / 2 years	
Temperature stability		
20 to 30 °C	± 1.5 x 10 <sup>-8</sup>	
Full temperature range	± 5 x 10 <sup>-8</sup>	
Achievable initial calibration accuracy	± 4 x 10 <sup>-8</sup>	
Residual FM	≤ (0.25 Hz x N) p-p in 20 ms (nominal)	
Frequency readout accuracy (start, stop, center, marker)		
± (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution <sup>1</sup> )		
Marker frequency counter		
Accuracy	± (marker frequency x frequency reference accuracy + 0.100 Hz)	
Delta counter accuracy	± (delta frequency x frequency reference accuracy + 0.141 Hz)	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
Stepped/Swept	± (0.25 % x span + horizontal resolution)	
FFT	± (0.1% x span + horizontal resolution)	

1. Horizontal resolution is span/(sweep points – 1).

<b>Sweep time and triggering</b>			
Range	Span = 0 Hz Span ≥ 10 Hz	1 μs to 6000 s 1 ms to 4000 s	
Accuracy	Span ≥ 10 Hz, swept Span ≥ 10 Hz, FFT Span = 0 Hz	± 0.01 % (nominal) ± 40 % (nominal) ± 0.01 % (nominal)	
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer		
Trigger delay	Span = 0 Hz or FFT Span ≥ 10 Hz, swept Resolution	-150 to +500 ms 0 μs to 500 ms 0.1 μs	
<b>Time gating</b>			
Gate methods	Gated LO; gated video; gated FFT		
Gate length range (except method = FFT)	100.0 ns to 5.0 s		
Gate delay range	0 to 100.0 s		
Gate delay jitter	33.3 ns p-p (nominal)		
<b>Sweep (trace) point range</b>			
All spans	1 to 4,000,001		
<b>Resolution bandwidth (RBW)</b>			
EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz		
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz		
Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps, E24 series, 24 per decade), 4, 5, 6, 8 MHz		
Bandwidth accuracy (power)	1 Hz to 750 kHz 820 kHz to 1.2 MHz (< 3.6 GHz CF) 1.3 to 2 MHz (< 3.6 GHz CF) 2.2 to 3 MHz (< 3.6 GHz CF) 4 to 8 MHz (< 3.6 GHz CF)	± 1.0 % (± 0.044 dB) ± 2.0 % (± 0.088 dB) ± 0.07 dB (nominal) ± 0.15 dB (nominal) ± 0.25 dB (nominal)	
Bandwidth accuracy (-3.01 dB)	1 Hz to 1.3 MHz	± 2 % (nominal)	
Selectivity (-60 dB/-3 dB)	4.1:1 (nominal)		
<b>RF preselector filters</b>	<b>Filter band</b>	<b>Filter type</b>	<b>6 dB BW (nominal)</b>
	20 Hz to 150 kHz	Fixed lowpass	310 kHz
	150 kHz to 1 MHz	Fixed bandpass	1.7 MHz
	1 to 2 MHz	Fixed bandpass	2.4 MHz
	2 to 5 MHz	Fixed bandpass	7.5 MHz
	5 to 8 MHz	Fixed bandpass	10 MHz
	8 to 11 MHz	Fixed bandpass	9.5 MHz
	11 to 14 MHz	Fixed bandpass	9.5 MHz
	14 to 17 MHz	Fixed bandpass	10 MHz
	17 to 20 MHz	Fixed bandpass	9.5 MHz
	20 to 24 MHz	Fixed bandpass	9.5 MHz
	24 to 30 MHz	Fixed bandpass	9.0 MHz
	30 to 70 MHz	Tracking bandpass	10 MHz
	70 to 150 MHz	Tracking bandpass	24 MHz
	150 to 300 MHz	Tracking bandpass	28 MHz
	300 to 600 MHz	Tracking bandpass	50 MHz
	600 MHz to 1 GHz	Tracking bandpass	60 MHz
	1 to 2 GHz	Tracking bandpass	180 MHz
	2 to 3.6 GHz	Fixed highpass	1.89 GHz (-3 dB corner frequency)

<b>Analysis bandwidth<sup>1</sup></b>		
Maximum bandwidth	Option B25 Standard	25 MHz 10 MHz
<b>Video bandwidth (VBW)</b>		
Range	1 Hz to 3 MHz (10 % steps, E24 series 24 per decade), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6 % (nominal)	
<b>Measurement speed<sup>2</sup></b>		
	<b>Standard</b>	
Local measurement and display update rate	4 ms (250/s) (nominal)	
Remote measurement and LAN transfer rate	5 ms (200/s) (nominal)	
Marker peak search	1.5 ms (nominal)	
Center frequency tune and transfer (RF)	20 ms (nominal)	
Center frequency tune and transfer ( $\mu$ W)	47 ms (nominal)	
Measurement/mode switching	39 ms (nominal)	
<b>Time domain sweep times</b>		
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	11.4 s (nominal)	
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	181.4 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	2.1 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	12.6 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	210.9 s (nominal)	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

## Amplitude Accuracy and Range Specifications

Amplitude range					
Measurement range	Displayed average noise level (DANL) to maximum safe input level				
Input attenuator range	0 to 70 dB in 2 dB steps				
Maximum safe input level (with and without preamp)					
	RF Input 1	RF Input 2			
Average total power	+30 dBm (1 W)	+30 dBm (1 W)			
Peak pulse power	+45 dBm (31.6 W)	+50 dBm (100 W)	< 10 $\mu$ s pulse width, < 1 % duty cycle and input attenuation $\geq$ 30 dB		
Surge power		+2k W	(10 $\mu$ s pulse width)		
DC volts					
DC coupled	$\pm$ 0.2 Vdc	$\pm$ 0.2 Vdc			
AC coupled	$\pm$ 100 Vdc	$\pm$ 100 Vdc			
Display range					
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)				
Linear scale	10 divisions				
Scale units	dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, A dBuV/m, dBuA/m, dBpT, dBG, dBpW				
Frequency response		Specification		95th percentile ( $\approx 2\sigma$ )	
		Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)
(10 dB input attenuation, 20 to 30 °C, preselector centering applied, $\sigma$ = nominal standard deviation)					
RF preselector off, preamp off	3 Hz to 20 Hz			$\pm$ 0.25 dB (nominal)	$\pm$ 0.25 dB (nominal)
	20 Hz to 10 MHz <sup>1</sup>	$\pm$ 0.6 dB	$\pm$ 0.6 dB	$\pm$ 0.22 dB	$\pm$ 0.25 dB
	10 to 50 MHz	$\pm$ 0.65 dB	$\pm$ 0.65 dB	$\pm$ 0.22 dB	$\pm$ 0.21 dB
	50 MHz to 3.6 GHz	$\pm$ 0.65 dB	$\pm$ 0.65 dB	$\pm$ 0.22 dB	$\pm$ 0.15 dB
	3.5 to 5.2 GHz	$\pm$ 1.5 dB	$\pm$ 1.6 dB	$\pm$ 0.47 dB	$\pm$ 0.6 dB
	5.2 to 8.4 GHz	$\pm$ 1.5 dB	$\pm$ 1.5 dB	$\pm$ 0.47 dB	$\pm$ 0.57 dB
	8.3 to 13.6 GHz	$\pm$ 1.5 dB	$\pm$ 1.5 dB	$\pm$ 0.46 dB	$\pm$ 0.54 dB
	13.5 to 17.1 GHz	$\pm$ 1.5 dB	$\pm$ 1.5 dB	$\pm$ 0.53 dB	$\pm$ 0.64 dB
	17 to 18 GHz	$\pm$ 1.5 dB	$\pm$ 1.7 dB	$\pm$ 0.57 dB	$\pm$ 0.72 dB
	18 to 22 GHz	$\pm$ 1.7 dB	$\pm$ 1.7 dB	$\pm$ 0.64 dB	$\pm$ 0.72 dB
	22 to 26.5 GHz	$\pm$ 1.7 dB	$\pm$ 1.7 dB	$\pm$ 0.61 dB	$\pm$ 0.71 dB
	26.4 to 34.5 GHz		$\pm$ 2.5 dB		$\pm$ 0.93 dB
	34.4 to 44 GHz		$\pm$ 3.2 dB		$\pm$ 1.24 dB
RF preselector off, preamp on (0 dB attenuation)	100 kHz to 3.6 GHz	$\pm$ 0.75 dB		$\pm$ 0.29 dB	
	100 kHz to 10 MHz		$\pm$ 0.75 dB		$\pm$ 0.43 dB
	10 to 50 MHz		$\pm$ 0.75 dB		$\pm$ 0.29 dB
	50 MHz to 3.6 GHz		$\pm$ 0.75 dB		$\pm$ 0.31 dB
	3.5 to 8.4 GHz	$\pm$ 1.85 dB		$\pm$ 0.63 dB	
	3.5 to 5.2 GHz		$\pm$ 2.2 dB		$\pm$ 0.9 dB
	5.2 to 8.4 GHz		$\pm$ 1.85 dB		$\pm$ 0.7 dB
	8.3 to 13.6 GHz	$\pm$ 1.95 dB	$\pm$ 1.95 dB	$\pm$ 0.64 dB	$\pm$ 0.79 dB
	13.5 to 17.1 GHz	$\pm$ 1.8 dB	$\pm$ 1.8 dB	$\pm$ 0.81 dB	$\pm$ 0.88 dB
	17 to 18 GHz	$\pm$ 2.0 dB		$\pm$ 0.95 dB	
	18 to 22 GHz	$\pm$ 2.85 dB		$\pm$ 1.23 dB	
	17 to 22 GHz		$\pm$ 2.85 dB		$\pm$ 1.07 dB
	22 to 26.5 GHz	$\pm$ 2.6 dB	$\pm$ 2.6 dB	$\pm$ 1.37 dB	$\pm$ 1.03 dB
	26.4 to 34.5 GHz		$\pm$ 3.0 dB		$\pm$ 1.35 dB
	34.4 to 44 GHz		$\pm$ 4.1 dB		$\pm$ 1.69 dB

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Frequency response (continued)		Specification		95th percentile ( $\approx 2\sigma$ )	
		Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)
RF preselector on, preamp off	3 Hz to 20 Hz			$\pm 0.3$ dB (nominal)	$\pm 0.3$ dB (nominal)
	20 Hz to 300 MHz <sup>1</sup>	$\pm 0.65$ dB	$\pm 0.65$ dB	$\pm 0.30$ dB	$\pm 0.3$ dB
	300 MHz to 1 GHz	$\pm 0.65$ dB	$\pm 0.65$ dB	$\pm 0.28$ dB	$\pm 0.28$ dB
	1 to 3.6 GHz	$\pm 0.85$ dB	$\pm 0.85$ dB	$\pm 0.36$ dB	$\pm 0.36$ dB
	3.5 to 8.4 GHz	$\pm 1.5$ dB		$\pm 0.47$ dB	
	3.5 to 5.2 GHz		$\pm 1.6$ dB		$\pm 0.6$ dB
	5.2 to 8.4 GHz		$\pm 1.5$ dB		$\pm 0.57$ dB
	8.3 to 13.6 GHz	$\pm 1.5$ dB	$\pm 1.5$ dB	$\pm 0.46$ dB	$\pm 0.54$ dB
	13.5 to 17.1 GHz	$\pm 1.5$ dB	$\pm 1.5$ dB	$\pm 0.53$ dB	$\pm 0.64$ dB
	17 to 18 GHz	$\pm 1.5$ dB	$\pm 1.7$ dB	$\pm 0.57$ dB	$\pm 0.72$ dB
	18 to 22 GHz	$\pm 1.7$ dB	$\pm 1.7$ dB	$\pm 0.64$ dB	$\pm 0.72$ dB
	22 to 26.5 GHz	$\pm 1.7$ dB	$\pm 1.7$ dB	$\pm 0.61$ dB	$\pm 0.71$ dB
	26.4 to 34.5 GHz		$\pm 2.5$ dB		$\pm 0.93$ dB
	34.4 to 44 GHz		$\pm 3.2$ dB		$\pm 1.24$ dB
RF preselector on, preamp on (0 dB attenuation)	1 kHz to 30 MHz <sup>1</sup>	$\pm 0.8$ dB	$\pm 0.8$ dB	$\pm 0.36$ dB	$\pm 0.36$ dB
	30 to 300 MHz <sup>1</sup>	$\pm 0.7$ dB	$\pm 0.70$ dB	$\pm 0.29$ dB	$\pm 0.29$ dB
	300 MHz to 1 GHz	$\pm 0.65$ dB	$\pm 0.65$ dB	$\pm 0.30$ dB	$\pm 0.30$ dB
	1 to 2.75 GHz	$\pm 0.95$ dB	$\pm 0.95$ dB	$\pm 0.45$ dB	$\pm 0.45$ dB
	2.75 to 3.6 GHz	$\pm 1.15$ dB	$\pm 1.15$ dB	$\pm 0.55$ dB	$\pm 0.55$ dB
	3.5 to 8.4 GHz	$\pm 1.85$ dB		$\pm 0.63$ dB	
	3.5 to 5.2 GHz		$\pm 2.2$ dB		$\pm 0.9$ dB
	5.2 to 8.4 GHz		$\pm 1.85$ dB		$\pm 0.7$ dB
	8.3 to 13.6 GHz	$\pm 1.95$ dB	$\pm 1.95$ dB	$\pm 0.64$ dB	$\pm 0.79$ dB
	13.5 to 17.1 GHz	$\pm 1.8$ dB	$\pm 1.8$ dB	$\pm 0.81$ dB	$\pm 0.88$ dB
	17 to 18 GHz	$\pm 2.0$ dB	$\pm 2.85$ dB	$\pm 0.95$ dB	$\pm 1.07$ dB
	18 to 22 GHz	$\pm 2.85$ dB	$\pm 2.85$ dB	$\pm 1.23$ dB	$\pm 1.07$ dB
	22 to 26.5 GHz	$\pm 2.6$ dB	$\pm 2.6$ dB	$\pm 1.37$ dB	$\pm 1.03$ dB
	26.4 to 34.5 GHz		$\pm 3.0$ dB		$\pm 1.35$ dB
34.4 to 44 GHz		$\pm 4.1$ dB		$\pm 1.69$ dB	

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Input attenuation switching uncertainty		Specifications	
Attenuation > 2 dB, preamp off	50 MHz	$\pm 0.20$ dB	$\pm 0.08$ dB (typical)
Relative to 10 dB (reference setting)	(reference frequency)		
Absolute amplitude accuracy		Specifications	
(10 dB attenuation, 20 to 30 °C, 1 Hz $\leq$ RBW $\leq$ 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, $\sigma$ = nominal standard deviation)			
RF preselector off and on, preamp off and on			
RF input 1 to 44 GHz	At 50 MHz	$\pm 0.33$ dB	$\pm 0.25$ dB
	At all frequencies	$\pm (0.33$ dB + frequency response)	
RF input 2 to 1 GHz	At 50 MHz	$\pm 0.36$ dB	$\pm 0.27$ dB
	At all frequencies	$\pm (0.36$ dB + frequency response)	



<b>Input voltage standing wave ratio (VSWR)</b>		<b>Input attenuation 0 dB</b>	<b>Input attenuation <math>\geq 10</math> dB</b>
<b>RF preselector off, preamp on and off</b>			
DC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	–	–
AC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
<b>RF preselector on, preamp on and off</b>			
DC coupled	9 kHz to 1 GHz	2.0:1	1.2:1
	1 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	–	–
AC coupled	50 MHz to 1 GHz	2.0:1	1.2:1
	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
<b>Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)</b>			
1 Hz to 1.5 MHz RBW	$\pm 0.05$ dB		
1.6 to 3 MHz RBW	$\pm 0.10$ dB		
4, 5, 6, 8 MHz RBW	$\pm 1.0$ dB		
<b>Reference level</b>			
Range			
Log scale	–170 to +30 dBm in 0.01 dB steps		
Linear scale	Same as log (707 pV to 7.07 V)		
Accuracy	0 dB		
<b>Display scale switching uncertainty</b>			
Switching between linear and log	0 dB		
Log scale/div switching	0 dB		
<b>Display scale fidelity</b>			
Between –10 dBm and –80 dBm input mixer level	$\pm 0.10$ dB total		
<b>Total measurement uncertainty<sup>1</sup></b>		<b>95th percentile (<math>\approx 2\sigma</math>)</b>	
<b>Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW <math>\leq 3</math> MHz, 20° to 30° C: AC coupled 10 MHz to 26.5 GHz DC coupled 9 kHz to 40 GHz</b>			
		<b>Option 503, 508, or 526 (RF/<math>\mu</math>W)</b>	<b>Option 544 (mmW)</b>
RF preselector off, preamp off	1 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	3.6 to 8 GHz	$\pm 0.80$ dB	$\pm 1.70$ dB
	8 to 18 GHz	$\pm 1.10$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.60$ dB	$\pm 1.60$ dB
	26.5 to 40 GHz		$\pm 1.70$ dB
	40 to 44 GHz		$\pm 2.30$ dB
RF preselector off, preamp on	100 kHz to 2 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	2 to 3.6 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	3.6 to 8 GHz	$\pm 1.10$ dB	$\pm 1.80$ dB
	8 to 18 GHz	$\pm 1.30$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.90$ dB	$\pm 1.90$ dB
	26.5 to 40 GHz		$\pm 1.90$ dB
	40 to 44 GHz		$\pm 2.40$ dB

1. Specified for instruments with prefixes MY/SG5322 or greater.

<b>Total measurement uncertainty<sup>1</sup> (continued)</b>		<b>95th percentile (<math>\approx 2\sigma</math>)</b>	
RF preselector on, preamp off	9 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	3.6 to 8 GHz	$\pm 0.80$ dB	$\pm 1.70$ dB
	8 to 18 GHz	$\pm 1.10$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.60$ dB	$\pm 1.60$ dB
	26.5 to 40 GHz		$\pm 1.70$ dB
	40 to 44 GHz		$\pm 2.30$ dB
RF preselector on, preamp on	9 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.70$ dB	$\pm 0.70$ dB
	3.6 to 8 GHz	$\pm 1.10$ dB	$\pm 1.80$ dB
	8 to 18 GHz	$\pm 1.30$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.90$ dB	$\pm 1.90$ dB
	26.5 to 40 GHz		$\pm 1.90$ dB
	40 to 44 GHz		$\pm 2.40$ dB
<b>Trace detectors</b>			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			
CISPR detectors: quasi-peak, EMI-avg, RMS-avg			
<b>Preamplifier</b>			
Gain			
RF preselector off	100 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	
RF preselector on	9 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	
<b>Amplitude probability distribution</b>		<b>Meets CISPR16-1-1:2010 requirements</b>	
Dynamic range	> 70 dB		
Amplitude accuracy	< $\pm 2.7$ dB		
Maximum measureable time period (no dead time)	2 minutes		
Minimum measureable probability	$10^{-7}$		
Amplitude level assignment	1000 levels		
Sampling rate	$\geq 10$ MSa/s (within a 1 MHz RBW)		
Amplitude resolution	0.1881 dB		

1. Specified for instruments with prefixes MY/SG5322 or greater.

## Dynamic Range Specifications

1 dB gain compression		Specification			Typical	
		Maximum power at mixer				
Frequency range		Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)	
<b>RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB)</b>						
RF preselector on and off, preamp off	9 kHz to 10 MHz			+4 dBm (nominal)	+4 dBm (nominal)	
	10 to 500 MHz	0 dBm	0 dBm	+3 dBm (typical)	+3 dBm (typical)	
	500 MHz to 3.6 GHz	+1 dBm	+1 dBm	+5 dBm (typical)	+5 dBm (typical)	
	3.6 to 26.5 GHz	0 dBm	0 dBm	+4 dBm (typical)	+4 dBm (typical)	
	26.4 to 44 GHz		-1 dBm		+2 dBm (nominal)	
RF preselector off, preamp on	10 MHz to 3.6 GHz			-13 dBm (nominal)	-13 dBm (nominal)	
	3.6 to 26.5 GHz					
	Tone spacing 100 kHz to 20 MHz			-26 dBm (nominal)	-30 dBm (nominal)	
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)	
	26.4 to 44 GHz				-30 dBm (nominal)	
RF preselector on, preamp on	9 kHz to 10 MHz			-16 dBm (nominal)	-16 dBm (nominal)	
	10 to 2 GHz			-18 dBm (typical)	-21 dBm (typical)	
	2 GHz to 3.6 GHz			-16 dBm (typical)	-17 dBm (typical)	
	3.6 to 26.5 GHz					
	Tone spacing, 100 kHz to 20 MHz			-26 dBm (nominal)	-30 dBm (nominal)	
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)	
	26.4 to 44 GHz				-30 dBm (nominal)	
<b>Displayed average noise level (DANL)</b>						
<b>(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)</b>						
<b>RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB</b>						
		Specification		Typical including NFE <sup>1</sup>		
RF preselector off, preamp off	3 Hz to 10 Hz	-		-97 dBm (nominal) <sup>3</sup>		
	20 Hz <sup>2</sup>	-97 dBm		-		
	100 Hz <sup>2</sup>	-106 dBm		-		
	1 kHz <sup>2</sup>	-118 dBm		-		
	9 kHz	-119 dBm		-		
	100 kHz	-131 dBm		-		
	1 MHz	-150 dBm		-		
	10 MHz to 2.1 GHz	-150 dBm		-158 dBm		
	2.1 to 3.6 GHz	-148 dBm		-157 dBm		
	3.5 to 8.4 GHz	-148 dBm		-159 dBm		
	Option 544	-145 dBm		-153 dBm		
	8.3 to 13.6 GHz	-147 dBm		-158 dBm		
	Option 544	-147 dBm		-156 dBm		
	13.5 to 17.1 GHz	-141 dBm		-151 dBm		
	17.0 to 20.0 GHz	-142 dBm		-152 dBm		
	20.0 to 26.5 GHz	-135 dBm		-146 dBm		
26.4 to 34.5 GHz	-141 dBm		-148 dBm			
34.4 to 44 GHz	-135 dBm		-143 dBm			
RF preselector off, preamp on	100 kHz	-144 dBm		-		
	1 MHz	-162 dBm		-		
	10 MHz to 2.1 GHz	-163 dBm		-175 dBm		
	2.1 to 3.6 GHz	-161 dBm		-173 dBm		
	3.5 to 8.4 GHz	-164 dBm		-172 dBm		
	Option 544	-161 dBm		-166 dBm		
	8.3 to 13.6 GHz	-162 dBm		-173 dBm		
	Option 544	-161 dBm		-170 dBm		
	13.5 to 17.1 GHz	-160 dBm		-171 dBm		
	17.0 to 20.0 GHz	-158 dBm		-165 dBm		
	20.0 to 26.5 GHz	-155 dBm		-162 dBm		
	26.4 to 34.5 GHz	-156 dBm		-164 dBm		
	34.4 to 44 GHz	-150 dBm		-158 dBm		

1. Typical Indicated Noise including NFE = typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE

2. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

3. No NFE at this frequency.

**Displayed average noise level (DANL) (continued)**

(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)  
 RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Specification	Typical including NFE <sup>1</sup>
RF preselector on, preamp off	3 to 10 Hz	–	–92 dBm (nominal) <sup>2</sup>
	20 Hz <sup>3</sup>	–92 dBm	–100 dBm <sup>2</sup>
	100 Hz <sup>3</sup>	–101 dBm	–109 dBm <sup>2</sup>
	1 kHz <sup>3</sup>	–114 dBm	–120 dBm <sup>2</sup>
	9 kHz	–118 dBm	–132 dBm
	100 kHz	–130 dBm	–143 dBm
	1 to 3 MHz	–147 dBm	–158 dBm
	3 to 30 MHz	–150 dBm	–160 dBm
	30 to 300 MHz	–151 dBm	–161 dBm
	300 to 600 MHz	–153 dBm	–164 dBm
	600 MHz to 1 GHz	–151 dBm	–162 dBm
	1 to 2 GHz	–150 dBm	–161 dBm
	2 to 2.5 GHz	–152 dBm	–164 dBm
	2.5 to 3 GHz	–151 dBm	–163 dBm
	3 to 3.6 GHz	–148 dBm	–161 dBm
	3.5 to 8.4 GHz	–148 dBm	–159 dBm
	Option 544	–145 dBm	–153 dBm
	8.3 to 13.6 GHz	–147 dBm	–158 dBm
	Option 544	–147 dBm	–156 dBm
	13.5 to 17.1 GHz	–141 dBm	–151 dBm
	17.0 to 20.0 GHz	–142 dBm	–152 dBm
	20.0 to 26.5 GHz	–135 dBm	–146 dBm
	26.4 to 34.5 GHz	–141 dBm	–148 dBm
	34.4 to 44 GHz	–135 dBm	–143 dBm
RF preselector on, preamp on	1 kHz <sup>3</sup>	–119 dBm	–133 dBm <sup>2</sup>
	9 kHz	–143 dBm	–154 dBm
	100 kHz	–154 dBm	–165 dBm
	1 to 2 MHz	–166 dBm	–178 dBm
	2 to 30 MHz	–158 dBm	–167 dBm
	30 to 600 MHz	–159 dBm	–166 dBm
	600 to 800 MHz	–157 dBm	–166 dBm
	800 MHz to 1 GHz	–158 dBm	–167 dBm
	1 to 2 GHz	–156 dBm	–164 dBm
	2 to 2.75 GHz	–160 dBm	–168 dBm
	2.75 to 3.6 GHz	–157 dBm	–165 dBm
	3.5 to 8.4 GHz	–164 dBm	–172 dBm
	Option 544	–161 dBm	–166 dBm
	8.3 to 13.6 GHz	–162 dBm	–173 dBm
	Option 544	–161 dBm	–170 dBm
	13.5 to 17.1 GHz	–160 dBm	–171 dBm
	17.0 to 20.0 GHz	–158 dBm	–165 dBm
	20.0 to 26.5 GHz	–155 dBm	–162 dBm
	26.4 to 34.5 GHz	–156 dBm	–164 dBm
	34.4 to 44 GHz	–150 dBm	–158 dBm

1. Typical DANL including NFE = Typical DANL–DANL improvement with NFE.

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

**Indicated noise in CISPR BW**

Calculated from DANL data; EMI-AVG detector, 0 dB input attenuation; indicated RBW is CISPR RBW  
 RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Typical including NFE <sup>1</sup>
RF preselector on, preamp off	3 to 10 Hz (1 Hz RBW) <sup>3</sup>	+ 17 dBuV <sup>2</sup> (nominal)
	20 Hz (1 Hz) <sup>3</sup>	+9 dBuV <sup>2</sup>
	100 Hz (10 Hz) <sup>3</sup>	+10 dBuV <sup>2</sup>
	1 kHz (100 Hz) <sup>3</sup>	+9 dBuV <sup>2</sup>
	9 kHz (200 Hz)	-2 dBuV
	100 kHz (200 Hz)	-13 dBuV
	1 to 3 MHz (9 kHz)	-11 dBuV
	3 to 30 MHz (9 kHz)	-13 dBuV
	30 to 300 MHz (120 kHz)	-3 dBuV
	300 to 600 MHz (120 kHz)	-6 dBuV
	600 MHz to 1 GHz (120 kHz)	-4 dBuV
	1 to 2 GHz (1 MHz)	+6 dBuV
	2 to 2.5 GHz (1 MHz)	+3 dBuV
	2.5 to 3 GHz (1 MHz)	+4 dBuV
	3 to 3.6 GHz (1 MHz)	+6 dBuV
	3.5 to 8.4 GHz (1 MHz)	+8 dBuV
	Option 544	+14 dBuV
	8.3 to 13.6 GHz (1 MHz)	+9 dBuV
	Option 544	+11 dBuV
	13.5 to 17.1 GHz (1 MHz)	+16 dBuV
17.0 to 20.0 GHz (1 MHz)	+15 dBuV	
20.0 to 26.5 GHz (1 MHz)	+21 dBuV	
26.4 to 34.5 GHz (1 MHz)	+19 dBuV	
34.4 to 44 GHz (1 MHz)	+24 dBuV	
RF preselector on, preamp on	1 kHz (100 Hz RBW) <sup>3</sup>	-4 dBuV <sup>2</sup>
	9 kHz (200 Hz)	-24 dBuV
	100 kHz (200 Hz)	-35 dBuV
	1 to 2 MHz (9 kHz)	-31 dBuV
	2 to 30 MHz (9 kHz)	-20 dBuV
	30 to 600 MHz (120 kHz)	-8 dBuV
	600 to 800 MHz (120 kHz)	-8 dBuV
	800 MHz to 1 GHz (120 kHz)	-9 dBuV
	1 to 2 GHz (1 MHz)	+3 dBuV
	2 to 2.75 GHz (1 MHz)	-1 dBuV
	2.75 to 3.6 GHz (1 MHz)	+2 dBuV
	3.5 to 8.4 GHz (1 MHz)	-5 dBuV
	Option 544	-1 dBuV
	8.3 to 13.6 GHz (1 MHz)	-6.0 dBuV
	Option 544	-4 dBuV
	13.5 to 17.1 GHz (1 MHz)	-4 dBuV
	17.0 to 20.0 GHz (1 MHz)	+2 dBuV
	20.0 to 26.5 GHz (1 MHz)	+5 dBuV
	26.4 to 34.5 GHz (1 MHz)	+3 dBuV
	34.4 to 44 GHz (1 MHz)	+9 dBuV

1. Typical Indicated Noise including NFE = Typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

<b>Spurious responses</b>			
<b>RF Input 1; RF preselector on and off</b>			
	<b>Source frequency</b>	<b>Specification</b>	<b>Typical</b>
Residual responses <sup>1</sup> (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz (swept)	-100 dBm	
	Zero span or FFT or other frequencies	-100 dBm (nominal)	
Image responses $f \pm 645$ MHz Mixer level -10 dBm	10 MHz to 3.6 GHz	-80 dBc	-108 dBc
	3.5 to 13.6 GHz	-78 dBc	-88 dBc
	13.5 to 17.1 GHz	-74 dBc	-85 dBc
	17.0 to 22 GHz	-70 dBc	-82 dBc
	22 to 26.5 GHz	-68 dBc	-78 dBc
	26.5 to 34.5 GHz <sup>3</sup> 34.4 to 44 GHz <sup>3</sup>	-70 dBc -60 dBc	-94 dBc -79 dBc
LO related spurious ( $f > 600$ MHz from carrier)	10 MHz to 3.6 GHz		-90 dBc + 20xlogN <sup>2</sup>
Other spurious $f \geq 10$ MHz from carrier	Carrier frequency $\leq 26.5$ GHz	-80 dBc + 20xlogN <sup>2</sup>	
	Carrier frequency $> 26.5$ GHz		-90 dBc (nominal)
<b>Second harmonic distortion (SHI)</b>			
<b>RF Input 1; input power -9 dBm, input attenuation 6 dB; RF Input 2 to 1 GHz. RF Input 2 performance = RF Input 1 performance +9 dB</b>			
	<b>Source frequency</b>	<b>Specification</b>	<b>Typical</b>
RF preselector off, preamp off	10 MHz to 1.0 GHz	+45 dBm	+54 dBm
	1.0 to 1.8 GHz	+41 dBm	+50 dBm
	1.8 to 6.8 GHz	+65 dBm	+68 dBm
	Option 544 1.8 to 3 GHz	+58 dBm	+64 dBm
	3 to 6.8 GHz	+60 dBm	+69 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)	+44 dBm	+51 dBm
RF preselector off, preamp on Preamp power = -45 dBm Preamp power = -50 dBm	10 MHz to 1.8 GHz		+33 dBm (nominal)
	1.8 to 13.25 GHz		+10 dBm (nominal)
	13.2 to 22 GHz (Option 544)		+0 dBm (nominal)
RF preselector on, preamp off	10 to 30 MHz	+47 dBm	+50 dBm
	30 to 500 MHz	+57 dBm	+63 dBm
	500 MHz to 1GHz	+46 dBm	+48 dBm
	1 to 1.6 GHz	+58 dBm	+70 dBm
	1.6 to 1.8 GHz	+46 dBm	+52 dBm
	1.8 to 6.8 GHz	+65 dBm	+68 dBm
	Option 544 1.8 to 3 GHz	+58 dBm	+64 dBm
	3 to 6.8 GHz	+60 dBm	+69 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)	+44 dBm	+51 dBm
RF preselector on, preamp on, Input power = -9 dBm Attenuation = 26 dB	10 to 300 MHz		+53 dBm (nominal)
	300 to 500 MHz		+58 dBm (nominal)
	500 MHz to 1 GHz		+47 dBm (nominal)
	1 to 1.6 GHz		+53 dBm (nominal)
	1.6 to 1.8 GHz		+30 dBm (nominal)
	Preamp power = -50 dBm	1.8 to 13.25 GHz 13.2 to 22 GHz (Option 544)	

1. RF2 performance = RF1 performance +11 dB
2. N is the LO multiplication factor
3. Mixer level -30 dBm

### Third-order intermodulation distortion (TOI)

(Two -14 dBm tones at input and 4 dB of input attenuation; tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths); RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB

		TOI	TOI (typical)
RF preselector off, preamp off	10 to 100 MHz	+12 dBm	+17 dBm
	100 to 400 MHz	+15 dBm	+20 dBm
	400 MHz to 1.7 GHz	+16 dBm	+20 dBm
	1.7 to 3.6 GHz	+16 dBm	+19 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz	+10 dBm	+13 dBm
RF preselector off, preamp on	10 to 500 MHz		+4 dBm (nominal)
	500 MHz to 3.6 GHz		+5 dBm (nominal)
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz		-17 dBm (nominal)
RF preselector on, preamp off	10 to 30 MHz	+12 dBm	+16 dBm
	30 MHz to 1 GHz	+12.5 dBm	+15 dBm
	1 to 1.5 GHz	+12.5 dBm	+14 dBm
	1.5 to 3.6 GHz	+14.5 dBm	+16 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz (Option 544)	+10 dBm	+13 dBm
RF preselector on, preamp on	10 to 30 MHz	-9 dBm	-5 dBm
	30 MHz to 1 GHz	-9 dBm	-4 dBm
	1 to 2 GHz	-4 dBm	-2 dBm
	2 to 3.6 GHz	-6 dBm	-3 dBm
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz (Option 544)		-17 dBm (nominal)
Phase noise <sup>2</sup>	Offset	Specification	Typical
Noise sidebands (20 to 30 °C, CF = 1 GHz)	10 Hz	-	-80 dBc/Hz (nominal)
	100 Hz	-91 dBc/Hz	-100 dBc/Hz
	1 kHz		-112 dBc/Hz (nominal)
	10 kHz		-114 dBc/Hz
	100 kHz		-117 dBc/Hz
	1 MHz		-136 dBc/Hz
	10 MHz		-148 dBc/Hz (nominal)

1. Preamp input power = input power-input attenuation (-9 dB for input 2).
2. For nominal values, refer to Figure 1.

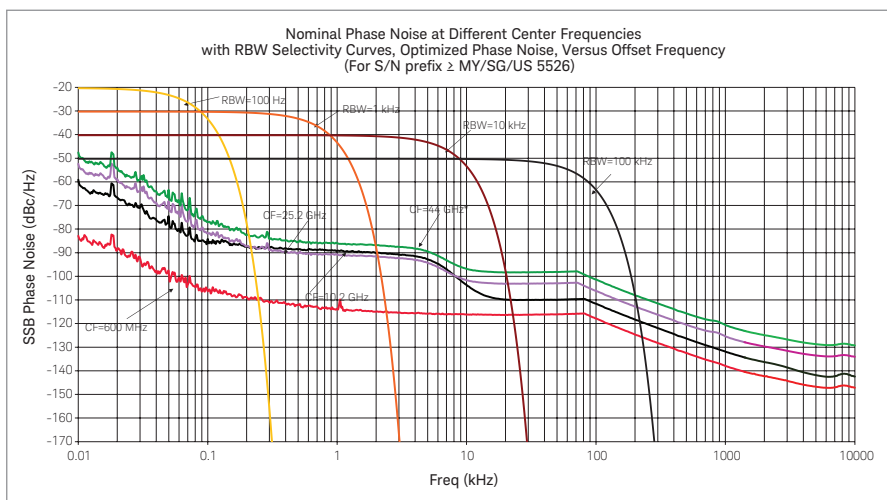


Figure 1. Nominal phase noise at different center frequencies

## PowerSuite Measurement Specifications

<b>Channel power</b>		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, at-tenuation = 10 dB)	± 0.82 dB (± 0.23 dB 95th percentile)	
<b>Occupied bandwidth</b>		
Frequency accuracy	± [span/1000] (nominal)	
<b>Adjacent channel power</b>		
Accuracy, W-CDMA (ACLR)		
(at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS	± 0.14 dB	± 0.21 dB
BTS	± 0.49 dB	± 0.44 dB
Dynamic range (typical)		
Without noise correction	-73 dB	-79 dB
With noise correction	-78 dB	-82 dB
Offset channel pairs measured	1 to 6	
ACP measurement and transfer time (fast method)	14 ms (nominal) ( $\sigma = 0.2$ dB)	
Multiple number of carriers measured	Up to 12	
<b>Power statistics CCDF</b>		
Histogram resolution	0.01 dB	
<b>Harmonic distortion</b>		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
<b>Burst power</b>		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
<b>Spurious emission</b>		
W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions		
Dynamic range	96.7 dB	101.7 dB (typical)
Absolute sensitivity	-85.4 dBm	
<b>Spectrum emission mask (SEM)</b>		
cdma2000® (750 kHz offset)		
Relative dynamic range (30 kHz RBW)	78.9 dB	85 dB (typical)
Absolute sensitivity	-100.7 dBm	
Relative accuracy	± 0.12 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range (30 kHz RBW)	81.9 dB	88.2 dB (typical)
Absolute sensitivity	-100.7 dBm	
Relative accuracy	± 0.12 dB	



## General Specifications

<b>Temperature range</b>	
Operating	0 to 55 °C
Storage	-40 to 70 °C
<b>EMC</b>	
Complies with European EMC Directive 2004/108/EC	
<ul style="list-style-type: none"> <li>- IEC/EN 61326-2-1</li> <li>- CISPR Pub 11 Group 1, class B</li> <li>- AS/NZS CISPR 11</li> <li>- ICES/NMB-001</li> </ul>	
This ISM device complies with Canadian ICES-001	
Cet appareil ISM est conforme à la norme NMB-001 du Canada	
<b>Radio disturbance measuring apparatus</b>	
CISPR 16-1-1	The features in this instrument comply with the performance requirements of this basic standard <sup>1</sup>
<b>Safety</b>	
Complies with European Low Voltage Directive 2006/95/EC	
<ul style="list-style-type: none"> <li>- IEC/EN 61010-1 2nd Edition</li> <li>- Canada: CSA C22.2 No. 61010-01-04</li> <li>- USA: UL 61010-1 2nd Edition</li> </ul>	
<b>Acoustic noise emission</b>	<b>Geraeuschemission</b>
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19
<b>Environmental stress</b>	
Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3	

1. The use of Noise Floor Extension (NFE) is required to meet the "isolated pulse" test case in Bands B, C, and D. In addition, when making measurements in Band B below 160 kHz using time domain scans or making measurements using meters in monitor spectrum, NFE is also required to meet the 1 Hz pulse repetition frequency (prf) test case for the quasi-peak detector (QPD) and for the 5 Hz prf test case for the RMS-avg detector.

**Power requirements**

Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
---------------------------------	--

Power consumption	
-------------------	--

On	450 W maximum
Standby	20 W

**Display**

Resolution	1024 x 768, XGA
------------	-----------------

Size	213 mm (8.4 in.) diagonal (nominal)
------	-------------------------------------

**Data storage**

Internal	≥ 80 GB (nominal) (removable solid state drive)
----------	---

External	Supports USB 2.0 compatible memory devices
----------	--

**Weight (without options)**

Net	24 kg (52 lbs) (nominal)
-----	--------------------------

Shipping	36 kg (79 lbs) (nominal)
----------	--------------------------

**Dimensions**

Height	177 mm (7.0 in)
--------	-----------------

Width	431 mm (17.0 in)
-------	------------------

Length	535 mm (21.0 in)
--------	------------------

**Warranty**

The MXE EMI receiver is supplied with a 3-year warranty

**Calibration cycle**

The recommended calibration cycle is one year; calibration services are available through Keysight service centers

## Inputs and Outputs

### Front panel

RF input	
RF Input 1 Connector	Type-N female, 50 $\Omega$ (nominal) (standard) 3.5 mm male, 50 $\Omega$ (Opt C35) 2.4 mm male, 50 $\Omega$ (Option 544 only)
RF Input 2 Connector	Type-N female, 50 $\Omega$ (nominal) (standard)
External Mixing (Option EXM)	
Connection port	
Connector	SMA, female
Impedance	50 $\Omega$ , nominal
Functions	Triplexed for LO output, IF input, and mixer bias
Mixer bias range	$\pm 10$ mA in 10 $\mu$ A step
IF input center frequency	
IF BW path $\leq 25$ MHz	322.5 MHz (note - please use the proper $\leq$ sign)
85 MHz BW IF path	300 MHz
LO output frequency range	3.75 to 14.0 GHz
Probe power	
Voltage/current	+15 Vdc, $\pm 7\%$ at 150 mA max (nominal) -12.6 Vdc, $\pm 10\%$ at 150 mA max (nominal)
USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)
Headphone jack	
Connector	Miniature stereo audio jack 3.5 mm

### Rear panel

10 MHz out	
Connector	BNC female, 50 $\Omega$ (nominal)
Output amplitude	$\geq 0$ dBm (nominal)
Frequency	10 MHz $\times$ (1+ frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 $\Omega$ (nominal)
Input amplitude range	-5 to 10 dBm (nominal)
Input frequency	1 to 50 MHz (nominal)
Frequency lock range	$\pm 5 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	$> 10$ k $\Omega$ (nominal)
Trigger level range	-5 to 5 V
Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 $\Omega$ (nominal)
Level	0 to 5 V (CMOS)

**Rear panel (continued)**

Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS Series noise source	For use with Keysight Technologies' SNS series noise sources
Analog out	
Connector	BNC female (used by Option YAS)
USB 2.0 ports	
Master (4 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)
Slave (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-B female
GPIO interface	
Connector	IEEE-488 bus connector
GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIO mode	Controller or device
LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 Ethertwist
Aux I/O connector	
Connector	25-pin D-SUB

## I/Q Analyzer

### Resolution bandwidth (spectrum measurement)

Range	
– Overall	100 mHz to 3 MHz
– Span = 1 MHz	50 Hz to 1 MHz
– Span = 10 kHz	1 Hz to 10 kHz
– Span = 100 Hz	100 mHz to 100 Hz

### Window shapes

Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

### Analysis bandwidth

Standard	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B85	10 Hz to 85 MHz

### IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
$\leq 3.6$	$\leq 10$	NA	$\pm 0.40$ dB	0.04 dB
$3.6 < f \leq 26.5$	$\leq 10$	On		0.25 dB
$f > 26.5$	$\leq 10$	On		0.35 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
$0.02 < f \leq 3.6$	$\leq 10$	NA	$0.4^\circ$	$0.1^\circ$
$3.6 < f \leq 26.5$	$\leq 10$	On	$1.0^\circ$	$0.2^\circ$ (nom)

### Data acquisition (10 MHz IF path)

Time record length	
– IQ analyzer	4,000,000 IQ sample pairs
Sample rate at ADC	100 MSa/s
ADC resolution	16 bits

## I/Q Analyzer – Option B25

### 25 MHz analysis bandwidth

#### IF frequency response

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
$\leq 3.6$	10 to $\leq 25$	NA	$\pm 0.45$ dB	0.051 dB
$3.6 < f \leq 44$	10 to $\leq 25$	On		0.45 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
$0.02 \leq f < 3.6$	$\leq 25$	NA	$0.6^\circ$	$0.14^\circ$
$3.6 \leq f \leq 26.5$	$\leq 25$	On	$4.5^\circ$	$1.2^\circ$

#### Data acquisition (25 MHz IF path)

Time record length (IQ pairs)				
– IQ analyzer	4,000,000 IQ sample pairs			
– 89600 VSA software	Data packing			
	32-bit	64-bit	Memory	
	536 MSa	268 MSa	2 GB	
Sample rate at ADC	100 MSa/s			
ADC resolution	16 bits			

## I/Q Analyzer – Option B85

### 85 MHz analysis bandwidth

<b>IF frequency response</b>					
IF frequency response (20 to 30 °C)				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Microwave preselector		Typical	RMS (nominal)
$0.15 \leq f < 3.6$	$\leq 85$	NA	$\pm 0.6$ dB	$\pm 0.17$ dB	0.05 dB
IF phase linearity (deviation from mean phase linearity, nominal)					
Center freq. (GHz)	Span (MHz)	Microwave preselector		Peak-to-peak (nominal)	RMS (nominal)
$0.03 \leq f < 3.6$	$\leq 85$	NA		1.6°	0.54°
<b>Dynamic range</b>					
SFDR (Spurious-free dynamic range)					
– Signal frequency and spurious response anywhere within 85 MHz BW		–76 dBc, nominal			
<b>Full scale (ADC clipping)</b>					
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)					
– Band 0		–8 dBm mixer level, nominal			
– Band 1 through 4		–7 dBm mixer level, nominal			
High gain setting, signal at CF (IF gain = High)					
– Band 0		–18 dBm mixer level nominal, subject to gain limitations			
– Band 1 through 4		–17 dBm mixer level nominal, subject to gain limitations			
Effect of signal frequency $\neq$ CF		Up to $\pm 3$ dB, nominal			
<b>Data acquisition (85 MHz IF path)</b>					
Time record length					
– IQ analyzer		4,000,000 IQ sample pairs			
Data packing					
– 89600 VSA software		32-bit		64-bit	
– Length (IQ sample pairs)		536 MSa ( $2^{29}$ Sa)		268 MSa ( $2^{28}$ Sa) 2 GB total memory	
– Length (time units)		Samples/(span x 1.25)			
<b>Sample rate</b>					
– At ADC		400 MSa/s			
– IQ pairs		Span dependent			
ADC resolution		14 bits			

## Real-Time Spectrum Analyzer (RTSA) <sup>1</sup>

### Option RT1

<b>Real-time analysis</b>	
Real-time analysis bandwidth	
– Option RT1	Up to 85 MHz $\leq$ 3.6GHz, Up to 40 MHz $>$ 3.6 GHz
Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy	
– Option RT1	3.7 $\mu$ s
Minimum acquisition time	104 $\mu$ s Spectrogram view only
FFT rate	292,969/s
Supported triggers	Level, Level with time qualified (TQT), Line, External, RF burst, Frame, Frequency mask (FMT), FMT with TQT

1. For additional RTSA specifications, please refer to Option RT1 Chapter in the MXE Signal Analyzer specifications guide (part number: N9038-90010)


## Related Literature

### Keysight MXE EMI receiver

<b>Publication title</b>	<b>Publication number</b>
<i>MXE EMI Receiver, Configuration Guide</i>	5990-7419EN
<i>MXE EMI Receiver, Brochure</i>	5990-7422EN

## Evolving

Our unique combination of hardware, software, support, and people can help you reach your next breakthrough. **We are unlocking the future of technology.**

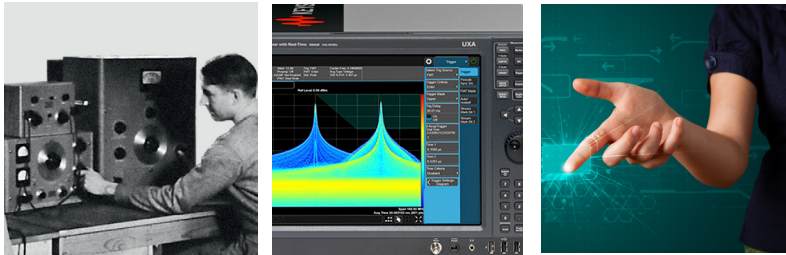

From Hewlett-Packard to Agilent to Keysight



**myKeysight**  
[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)  
 A personalized view into the information most relevant to you.

**Keysight Infoline**  
[www.keysight.com/find/Infoline](http://www.keysight.com/find/Infoline)  
 Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

**KEYSIGHT SERVICES**  
**Keysight Services**  
[www.keysight.com/find/services](http://www.keysight.com/find/services)  
 Our deep offering in design, test, and measurement services deploys an industry-leading array of people, processes, and tools. The result? We help you implement new technologies and engineer improved processes that lower costs.

**Three-Year Warranty**  
[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)  
 Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



**Keysight Assurance Plans**  
[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)  
 Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.



**Keysight Channel Partners**  
[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)  
 Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.

[www.keysight.com/find/mxe](http://www.keysight.com/find/mxe)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-06-08-16)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
 Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2015  
 Quality Management System

This information is subject to change without notice.  
 © Keysight Technologies, 2012 - 2016  
 Published in USA, August 10, 2016  
 5990-7421EN  
[www.keysight.com](http://www.keysight.com)