

SCHWARZBECK MESS - ELEKTRONIK

An der Klinge 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49)6228/1003

VULB 9168

Korrekturdaten für kurze Meßentfernung (Mitte-Prüfling) Correction for Short Measuring Distance (Center-EuT)

| Frequency | Gain(Iso.) | Ant.-Fact k | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
|-----------------------------------|------------------------------------|------------------------------------|--|---------|---------|--------|---------|--------|
| Frequenz | Gewinn | Ant.Faktor | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
| MHz | dBi | dB/m | dBi | dB/m | dBi | dB/m | dBi | dB/m |
| 20.0 | -19.57 | 15.81 | -19.91 | 16.16 | -20.67 | 16.91 | -22.52 | 18.76 |
| 22.0 | -17.76 | 14.82 | -18.10 | 15.17 | -18.86 | 15.93 | -20.71 | 17.78 |
| 25.0 | -14.85 | 13.03 | -15.19 | 13.37 | -15.95 | 14.13 | -17.80 | 15.98 |
| 27.0 | -12.74 | 11.59 | -13.08 | 11.93 | -13.84 | 12.69 | -15.69 | 14.54 |
| 30.0 | -12.36 | 12.12 | -12.70 | 12.47 | -13.46 | 13.22 | -15.31 | 15.08 |
| 35.0 | -11.19 | 12.29 | -11.53 | 12.64 | -12.29 | 13.39 | -14.14 | 15.24 |
| 40.0 | -10.71 | 12.97 | -11.05 | 13.32 | -11.81 | 14.07 | -13.66 | 15.92 |
| 45.0 | -9.27 | 12.55 | -9.61 | 12.90 | -10.37 | 13.65 | -12.22 | 15.51 |
| 50.0 | -8.24 | 12.44 | -8.58 | 12.78 | -9.34 | 13.54 | -11.19 | 15.39 |
| 60.0 | -5.87 | 11.66 | -6.21 | 12.00 | -6.97 | 12.75 | -8.82 | 14.61 |
| 70.0 | -2.60 | 9.73 | -2.94 | 10.07 | -3.70 | 10.82 | -5.55 | 12.68 |
| 80.0 | 0.09 | 8.20 | -0.25 | 8.54 | -1.01 | 9.29 | -2.86 | 11.15 |
| 90.0 | 0.96 | 8.34 | 0.62 | 8.69 | -0.14 | 9.44 | -1.99 | 11.30 |
| 100.0 | 1.17 | 9.05 | 0.83 | 9.39 | 0.07 | 10.15 | -1.78 | 12.00 |
| 110.0 | 1.02 | 10.03 | 0.68 | 10.37 | -0.08 | 11.13 | -1.93 | 12.98 |
| 120.0 | 0.66 | 11.14 | 0.32 | 11.49 | -0.44 | 12.24 | -2.29 | 14.10 |
| 130.0 | 0.81 | 11.69 | 0.47 | 12.03 | -0.29 | 12.79 | -2.14 | 14.64 |
| 140.0 | 0.73 | 12.41 | 0.39 | 12.76 | -0.37 | 13.51 | -2.22 | 15.37 |
| 150.0 | 0.68 | 13.06 | 0.34 | 13.41 | -0.42 | 14.16 | -2.27 | 16.02 |
| 160.0 | 1.26 | 13.04 | 0.92 | 13.39 | 0.16 | 14.14 | -1.69 | 16.00 |
| 170.0 | 2.75 | 12.08 | 2.41 | 12.42 | 1.65 | 13.18 | -0.20 | 15.03 |
| 180.0 | 4.75 | 10.57 | 4.41 | 10.92 | 3.65 | 11.68 | 1.80 | 13.53 |
| 190.0 | 6.31 | 9.48 | 6.00 | 9.79 | 5.33 | 10.47 | 3.64 | 12.16 |
| 200.0 | 7.22 | 9.02 | 6.95 | 9.29 | 6.34 | 9.90 | 4.81 | 11.43 |
| 210.0 | 7.38 | 9.29 | 7.14 | 9.53 | 6.59 | 10.07 | 5.20 | 11.46 |
| 220.0 | 7.12 | 9.95 | 6.91 | 10.16 | 6.42 | 10.64 | 5.18 | 11.89 |
| 230.0 | 6.86 | 10.60 | 6.67 | 10.78 | 6.25 | 11.21 | 5.13 | 12.32 |
| 240.0 | 6.92 | 10.90 | 6.75 | 11.07 | 6.37 | 11.45 | 5.37 | 12.45 |
| 250.0 | 7.09 | 11.08 | 6.94 | 11.24 | 6.61 | 11.57 | 5.73 | 12.45 |
| 260.0 | 7.16 | 11.36 | 7.03 | 11.48 | 6.75 | 11.77 | 5.98 | 12.54 |
| 270.0 | 7.11 | 11.74 | 7.00 | 11.85 | 6.76 | 12.09 | 6.09 | 12.76 |
| 280.0 | 7.09 | 12.08 | 7.00 | 12.16 | 6.79 | 12.37 | 6.22 | 12.94 |
| 290.0 | 7.13 | 12.34 | 7.06 | 12.41 | 6.89 | 12.58 | 6.42 | 13.05 |
| 300.0 | 7.16 | 12.60 | 7.10 | 12.66 | 6.96 | 12.80 | 6.57 | 13.19 |
| 325.0 | 7.11 | 13.34 | 7.08 | 13.37 | 7.02 | 13.43 | 6.85 | 13.60 |
| 350.0 | 7.26 | 13.84 | 7.26 | 13.84 | 7.27 | 13.83 | 7.30 | 13.80 |
| 375.0 | 7.28 | 14.42 | 7.31 | 14.39 | 7.38 | 14.32 | 7.59 | 14.11 |
| 400.0 | 7.35 | 14.91 | 7.40 | 14.86 | 7.53 | 14.74 | 7.89 | 14.37 |
| 425.0 | 7.17 | 15.62 | 7.24 | 15.55 | 7.40 | 15.38 | 7.89 | 14.89 |
| 450.0 | 7.02 | 16.26 | 7.11 | 16.18 | 7.31 | 15.97 | 7.94 | 15.35 |
| 475.0 | 7.20 | 16.55 | 7.30 | 16.45 | 7.55 | 16.20 | 8.31 | 15.44 |
| 500.0 | 7.29 | 16.91 | 7.41 | 16.79 | 7.69 | 16.51 | 8.55 | 15.65 |
| 525.0 | 7.22 | 17.41 | 7.35 | 17.27 | 7.67 | 16.96 | 8.63 | 15.99 |
| 550.0 | 7.16 | 17.87 | 7.30 | 17.73 | 7.64 | 17.39 | 8.67 | 16.35 |
| 575.0 | 7.08 | 18.34 | 7.23 | 18.18 | 7.60 | 17.81 | 8.75 | 16.66 |
| 600.0 | 6.91 | 18.88 | 7.07 | 18.71 | 7.46 | 18.32 | 8.69 | 17.10 |
| Bezugs- punkt: | Strahlungs -zone: | Strahlungs -zone: | Mitte der Log. - Per. Struktur | | | | | |
| Reference Point: | Radiating Zone: | Radiating Zone: | Center of Log. - Per. Structure | | | | | |

SCHWARZBECK MESS - ELEKTRONIK

An der Klinge 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49)6228/1003

VULB 9168

Korrekturdaten für kurze Meßentfernung (Mitte-Prüfling) Correction for Short Measuring Distance (Center-EuT)

| Frequency | Gain(Iso.) | Ant.-Fact k | gi (10m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
|-----------------------------------|------------------------------------|------------------------------------|--|---------|---------|--------|---------|--------|
| Frequenz | Gewinn | Ant.Faktor | gi (10m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
| MHz | dBi | dB/m | dBi | dB/m | dBi | dB/m | dBi | dB/m |
| 600.0 | 6.91 | 18.88 | 7.07 | 18.71 | 7.46 | 18.32 | 8.69 | 17.10 |
| 625.0 | 6.75 | 19.39 | 6.92 | 19.22 | 7.33 | 18.80 | 8.63 | 17.50 |
| 675.0 | 6.78 | 20.02 | 6.96 | 19.84 | 7.41 | 19.40 | 8.83 | 17.98 |
| 700.0 | 6.82 | 20.30 | 7.01 | 20.11 | 7.48 | 19.64 | 8.98 | 18.14 |
| 725.0 | 6.76 | 20.67 | 6.96 | 20.46 | 7.45 | 19.97 | 9.03 | 18.40 |
| 750.0 | 6.74 | 20.98 | 6.95 | 20.77 | 7.45 | 20.27 | 9.07 | 18.65 |
| 775.0 | 6.74 | 21.27 | 6.95 | 21.06 | 7.46 | 20.54 | 9.12 | 18.88 |
| 800.0 | 6.84 | 21.44 | 7.06 | 21.23 | 7.58 | 20.70 | 9.28 | 19.00 |
| 825.0 | 6.91 | 21.64 | 7.13 | 21.41 | 7.68 | 20.87 | 9.47 | 19.08 |
| 850.0 | 6.98 | 21.83 | 7.21 | 21.60 | 7.77 | 21.04 | 9.60 | 19.21 |
| 875.0 | 6.94 | 22.12 | 7.17 | 21.89 | 7.74 | 21.32 | 9.61 | 19.45 |
| 900.0 | 6.85 | 22.45 | 7.09 | 22.22 | 7.67 | 21.64 | 9.58 | 19.72 |
| 925.0 | 6.74 | 22.81 | 6.98 | 22.56 | 7.58 | 21.97 | 9.53 | 20.01 |
| 950.0 | 6.80 | 22.98 | 7.04 | 22.73 | 7.64 | 22.14 | 9.59 | 20.18 |
| 975.0 | 6.94 | 23.06 | 7.19 | 22.81 | 7.79 | 22.21 | 9.79 | 20.21 |
| 1000.0 | 7.12 | 23.10 | 7.37 | 22.85 | 7.99 | 22.23 | 10.03 | 20.19 |
| 1050.0 | 7.29 | 23.35 | 7.55 | 23.10 | 8.17 | 22.47 | 10.26 | 20.38 |
| 1100.0 | 7.18 | 23.87 | 7.44 | 23.60 | 8.10 | 22.95 | 10.28 | 20.77 |
| 1150.0 | 7.15 | 24.28 | 7.42 | 24.01 | 8.08 | 23.35 | 10.31 | 21.12 |
| 1200.0 | 7.12 | 24.69 | 7.39 | 24.41 | 8.07 | 23.74 | 10.34 | 21.46 |
| 1250.0 | 7.04 | 25.12 | 7.32 | 24.84 | 8.00 | 24.15 | 10.33 | 21.83 |
| 1300.0 | 6.74 | 25.75 | 7.02 | 25.48 | 7.72 | 24.78 | 10.09 | 22.41 |
| 1350.0 | 6.60 | 26.22 | 6.89 | 25.94 | 7.60 | 25.23 | 10.01 | 22.81 |
| 1400.0 | 6.53 | 26.62 | 6.82 | 26.32 | 7.54 | 25.60 | 10.01 | 23.13 |
| 1450.0 | 6.45 | 27.00 | 6.74 | 26.71 | 7.46 | 25.99 | 9.93 | 23.52 |
| 1500.0 | 6.11 | 27.63 | 6.41 | 27.34 | 7.14 | 26.60 | 9.65 | 24.09 |
| 1550.0 | 5.59 | 28.43 | 5.89 | 28.14 | 6.63 | 27.39 | 9.20 | 24.83 |
| 1600.0 | 5.05 | 29.25 | 5.35 | 28.95 | 6.09 | 28.21 | 8.66 | 25.64 |
| 1650.0 | 4.65 | 29.92 | 4.95 | 29.61 | 5.71 | 28.86 | 8.33 | 26.24 |
| 1700.0 | 4.45 | 30.38 | 4.75 | 30.07 | 5.51 | 29.32 | 8.13 | 26.70 |
| 1750.0 | 4.20 | 30.88 | 4.51 | 30.57 | 5.28 | 29.80 | 7.94 | 27.14 |
| 1800.0 | 3.94 | 31.39 | 4.25 | 31.08 | 5.02 | 30.31 | 7.68 | 27.64 |
| 1850.0 | 3.54 | 32.02 | 3.85 | 31.71 | 4.63 | 30.93 | 7.35 | 28.21 |
| 1900.0 | 2.88 | 32.91 | 3.19 | 32.60 | 3.97 | 31.82 | 6.69 | 29.11 |
| 1950.0 | 2.49 | 33.53 | 2.81 | 33.21 | 3.60 | 32.42 | 6.37 | 29.65 |
| 2000.0 | 2.07 | 34.18 | 2.39 | 33.85 | 3.18 | 33.06 | 5.95 | 30.29 |
| Bezugs- punkt: | Strahlungs -zone: | Strahlungs -zone: | Mitte der Log. - Per. Struktur | | | | | |
| Reference Point: | Radiating Zone: | Radiating Zone: | Center of Log. - Per. Structure | | | | | |

SCHWARZBECK MESS - ELEKTRONIK

An der Klinge 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49)6228/1003

VULB 9168

Korrekturdaten für kurze Meßentfernung (Spitze-Prüfling) Correction for Short Measuring Distance (Tip-EuT)

| Frequency | Gain(Iso.) | Ant.-Fact k | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
|-----------------------------------|------------------------------------|------------------------------------|--|---------|---------|--------|---------|--------|
| Frequenz | Gewinn | Ant.Faktor | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
| MHz | dBi | dB/m | dBi | dB/m | dBi | dB/m | dBi | dB/m |
| 20.0 | -19.57 | 15.81 | -20.24 | 16.48 | -21.63 | 17.88 | -24.70 | 20.94 |
| 22.0 | -17.76 | 14.82 | -18.43 | 15.50 | -19.82 | 16.89 | -22.89 | 19.96 |
| 25.0 | -14.85 | 13.03 | -15.52 | 13.70 | -16.91 | 15.09 | -19.98 | 18.16 |
| 27.0 | -12.74 | 11.59 | -13.41 | 12.26 | -14.80 | 13.65 | -17.87 | 16.72 |
| 30.0 | -12.36 | 12.12 | -13.03 | 12.79 | -14.42 | 14.19 | -17.49 | 17.25 |
| 35.0 | -11.19 | 12.29 | -11.86 | 12.96 | -13.25 | 14.36 | -16.32 | 17.42 |
| 40.0 | -10.71 | 12.97 | -11.38 | 13.64 | -12.77 | 15.04 | -15.84 | 18.10 |
| 45.0 | -9.27 | 12.55 | -9.94 | 13.23 | -11.33 | 14.62 | -14.40 | 17.68 |
| 50.0 | -8.24 | 12.44 | -8.91 | 13.11 | -10.30 | 14.50 | -13.37 | 17.57 |
| 60.0 | -5.87 | 11.66 | -6.54 | 12.33 | -7.93 | 13.72 | -11.00 | 16.78 |
| 70.0 | -2.60 | 9.73 | -3.27 | 10.39 | -4.66 | 11.79 | -7.73 | 14.85 |
| 80.0 | 0.09 | 8.20 | -0.58 | 8.86 | -1.97 | 10.26 | -5.04 | 13.32 |
| 90.0 | 0.96 | 8.34 | 0.29 | 9.02 | -1.10 | 10.41 | -4.17 | 13.47 |
| 100.0 | 1.17 | 9.05 | 0.50 | 9.72 | -0.89 | 11.11 | -3.96 | 14.18 |
| 110.0 | 1.02 | 10.03 | 0.35 | 10.70 | -1.04 | 12.09 | -4.11 | 15.16 |
| 120.0 | 0.66 | 11.14 | -0.01 | 11.82 | -1.40 | 13.21 | -4.47 | 16.27 |
| 130.0 | 0.81 | 11.69 | 0.14 | 12.36 | -1.25 | 13.75 | -4.32 | 16.82 |
| 140.0 | 0.73 | 12.41 | 0.06 | 13.09 | -1.33 | 14.48 | -4.40 | 17.54 |
| 150.0 | 0.68 | 13.06 | 0.01 | 13.73 | -1.38 | 15.13 | -4.45 | 18.19 |
| 160.0 | 1.26 | 13.04 | 0.59 | 13.71 | -0.80 | 15.11 | -3.87 | 18.17 |
| 170.0 | 2.75 | 12.08 | 2.08 | 12.75 | 0.69 | 14.14 | -2.38 | 17.21 |
| 180.0 | 4.75 | 10.57 | 4.08 | 11.25 | 2.69 | 12.64 | -0.38 | 15.70 |
| 190.0 | 6.31 | 9.48 | 5.67 | 10.12 | 4.35 | 11.45 | 1.40 | 14.40 |
| 200.0 | 7.22 | 9.02 | 6.62 | 9.62 | 5.35 | 10.89 | 2.51 | 13.73 |
| 210.0 | 7.38 | 9.29 | 6.80 | 9.86 | 5.59 | 11.07 | 2.85 | 13.82 |
| 220.0 | 7.12 | 9.95 | 6.57 | 10.50 | 5.42 | 11.65 | 2.77 | 14.30 |
| 230.0 | 6.86 | 10.60 | 6.34 | 11.12 | 5.23 | 12.23 | 2.67 | 14.78 |
| 240.0 | 6.92 | 10.90 | 6.42 | 11.41 | 5.35 | 12.48 | 2.86 | 14.96 |
| 250.0 | 7.09 | 11.08 | 6.61 | 11.57 | 5.58 | 12.60 | 3.17 | 15.01 |
| 260.0 | 7.16 | 11.36 | 6.70 | 11.82 | 5.71 | 12.81 | 3.38 | 15.14 |
| 270.0 | 7.11 | 11.74 | 6.67 | 12.18 | 5.71 | 13.14 | 3.44 | 15.40 |
| 280.0 | 7.09 | 12.08 | 6.66 | 12.50 | 5.74 | 13.42 | 3.54 | 15.62 |
| 290.0 | 7.13 | 12.34 | 6.72 | 12.75 | 5.83 | 13.64 | 3.70 | 15.77 |
| 300.0 | 7.16 | 12.60 | 6.76 | 13.00 | 5.90 | 13.87 | 3.81 | 15.95 |
| 325.0 | 7.11 | 13.34 | 6.74 | 13.71 | 5.95 | 14.51 | 4.00 | 16.45 |
| 350.0 | 7.26 | 13.84 | 6.92 | 14.18 | 6.19 | 14.92 | 4.37 | 16.73 |
| 375.0 | 7.28 | 14.42 | 6.97 | 14.73 | 6.28 | 15.42 | 4.58 | 17.12 |
| 400.0 | 7.35 | 14.91 | 7.06 | 15.20 | 6.42 | 15.84 | 4.81 | 17.45 |
| 425.0 | 7.17 | 15.62 | 6.90 | 15.89 | 6.29 | 16.50 | 4.76 | 18.03 |
| 450.0 | 7.02 | 16.26 | 6.76 | 16.52 | 6.19 | 17.09 | 4.74 | 18.54 |
| 475.0 | 7.20 | 16.55 | 6.96 | 16.79 | 6.42 | 17.33 | 5.06 | 18.70 |
| 500.0 | 7.29 | 16.91 | 7.06 | 17.14 | 6.55 | 17.64 | 5.25 | 18.95 |
| 525.0 | 7.22 | 17.41 | 7.01 | 17.62 | 6.52 | 18.10 | 5.28 | 19.34 |
| 550.0 | 7.16 | 17.87 | 6.95 | 18.07 | 6.49 | 18.54 | 5.29 | 19.74 |
| 575.0 | 7.08 | 18.34 | 6.89 | 18.53 | 6.45 | 18.96 | 5.32 | 20.10 |
| 600.0 | 6.91 | 18.88 | 6.73 | 19.06 | 6.31 | 19.47 | 5.22 | 20.56 |
| Bezugs- punkt: | Strahlungs -zone: | Strahlungs -zone: | Spitze der Log. - Per. Struktur | | | | | |
| Reference Point: | Radiating Zone: | Radiating Zone: | Tip of Log. - Per. Structure | | | | | |

SCHWARZBECK MESS - ELEKTRONIK

An der Klinge 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49)6228/1003

VULB 9168

Korrekturdaten für kurze Meßentfernung (Spitze-Prüfling) Correction for Short Measuring Distance (Tip-EuT)



| Frequency | Gain(Iso.) | Ant.-Fact k | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
|-----------------------------------|------------------------------------|------------------------------------|--|---------|---------|--------|---------|--------|
| Frequenz | Gewinn | Ant.Faktor | gi (10 m) | k (10m) | gi (3m) | k (3m) | gi (1m) | k (1m) |
| MHz | dBi | dB/m | dBi | dB/m | dBi | dB/m | dBi | dB/m |
| 600.0 | 6.91 | 18.88 | 6.73 | 19.06 | 6.31 | 19.47 | 5.22 | 20.56 |
| 625.0 | 6.75 | 19.39 | 6.57 | 19.56 | 6.18 | 19.96 | 5.13 | 21.01 |
| 675.0 | 6.78 | 20.02 | 6.62 | 20.19 | 6.25 | 20.56 | 5.27 | 21.54 |
| 700.0 | 6.82 | 20.30 | 6.67 | 20.46 | 6.31 | 20.81 | 5.38 | 21.74 |
| 725.0 | 6.76 | 20.67 | 6.61 | 20.81 | 6.28 | 21.15 | 5.40 | 22.03 |
| 750.0 | 6.74 | 20.98 | 6.60 | 21.12 | 6.27 | 21.45 | 5.41 | 22.31 |
| 775.0 | 6.74 | 21.27 | 6.60 | 21.40 | 6.29 | 21.72 | 5.45 | 22.56 |
| 800.0 | 6.84 | 21.44 | 6.71 | 21.58 | 6.40 | 21.88 | 5.59 | 22.69 |
| 825.0 | 6.91 | 21.64 | 6.78 | 21.76 | 6.50 | 22.05 | 5.73 | 22.82 |
| 850.0 | 6.98 | 21.83 | 6.86 | 21.95 | 6.58 | 22.22 | 5.84 | 22.97 |
| 875.0 | 6.94 | 22.12 | 6.82 | 22.24 | 6.56 | 22.50 | 5.84 | 23.22 |
| 900.0 | 6.85 | 22.45 | 6.74 | 22.57 | 6.48 | 22.82 | 5.79 | 23.52 |
| 925.0 | 6.74 | 22.81 | 6.63 | 22.91 | 6.39 | 23.16 | 5.72 | 23.83 |
| 950.0 | 6.80 | 22.98 | 6.69 | 23.08 | 6.45 | 23.33 | 5.78 | 24.00 |
| 975.0 | 6.94 | 23.06 | 6.84 | 23.16 | 6.60 | 23.40 | 5.96 | 24.04 |
| 1000.0 | 7.12 | 23.10 | 7.02 | 23.20 | 6.79 | 23.43 | 6.17 | 24.05 |
| 1050.0 | 7.29 | 23.35 | 7.19 | 23.45 | 6.98 | 23.67 | 6.38 | 24.26 |
| 1100.0 | 7.18 | 23.87 | 7.09 | 23.95 | 6.90 | 24.15 | 6.35 | 24.70 |
| 1150.0 | 7.15 | 24.28 | 7.07 | 24.37 | 6.88 | 24.55 | 6.36 | 25.07 |
| 1200.0 | 7.12 | 24.69 | 7.04 | 24.76 | 6.86 | 24.94 | 6.37 | 25.43 |
| 1250.0 | 7.04 | 25.12 | 6.97 | 25.19 | 6.80 | 25.36 | 6.33 | 25.83 |
| 1300.0 | 6.74 | 25.75 | 6.67 | 25.83 | 6.51 | 25.99 | 6.07 | 26.43 |
| 1350.0 | 6.60 | 26.22 | 6.54 | 26.29 | 6.39 | 26.44 | 5.97 | 26.85 |
| 1400.0 | 6.53 | 26.62 | 6.47 | 26.67 | 6.33 | 26.81 | 5.94 | 27.20 |
| 1450.0 | 6.45 | 27.00 | 6.39 | 27.06 | 6.25 | 27.20 | 5.86 | 27.59 |
| 1500.0 | 6.11 | 27.63 | 6.05 | 27.69 | 5.92 | 27.82 | 5.56 | 28.18 |
| 1550.0 | 5.59 | 28.43 | 5.54 | 28.49 | 5.42 | 28.61 | 5.08 | 28.94 |
| 1600.0 | 5.05 | 29.25 | 5.00 | 29.30 | 4.88 | 29.42 | 4.54 | 29.76 |
| 1650.0 | 4.65 | 29.92 | 4.60 | 29.97 | 4.49 | 30.08 | 4.18 | 30.38 |
| 1700.0 | 4.45 | 30.38 | 4.40 | 30.43 | 4.29 | 30.54 | 3.98 | 30.84 |
| 1750.0 | 4.20 | 30.88 | 4.16 | 30.92 | 4.06 | 31.02 | 3.78 | 31.30 |
| 1800.0 | 3.94 | 31.39 | 3.90 | 31.43 | 3.80 | 31.53 | 3.52 | 31.81 |
| 1850.0 | 3.54 | 32.02 | 3.50 | 32.06 | 3.41 | 32.15 | 3.16 | 32.41 |
| 1900.0 | 2.88 | 32.91 | 2.84 | 32.95 | 2.75 | 33.04 | 2.50 | 33.30 |
| 1950.0 | 2.49 | 33.53 | 2.46 | 33.57 | 2.37 | 33.65 | 2.15 | 33.87 |
| 2000.0 | 2.07 | 34.18 | 2.04 | 34.21 | 1.95 | 34.29 | 1.73 | 34.51 |
| Bezugs- punkt: | Strahlungs -zone: | Strahlungs -zone: | Spitze der Log. - Per. Struktur | | | | | |
| Reference Point: | Radiating Zone: | Radiating Zone: | Tip of Log. - Per. Structure | | | | | |

SCHWARZBECK MESS - ELEKTRONIK

An der Klinge 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49)6228/1003

VULB 9168

Korrekturdaten für kurze Meßentfernung *Correction for Short Measuring Distance*

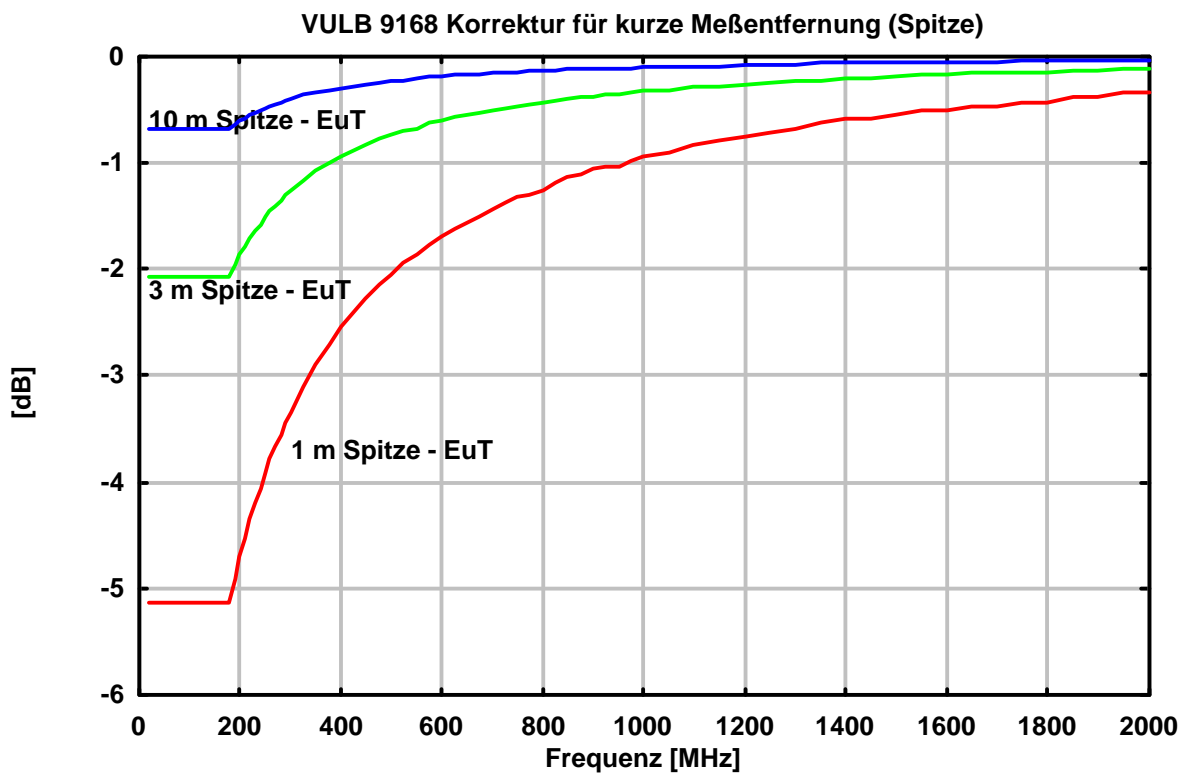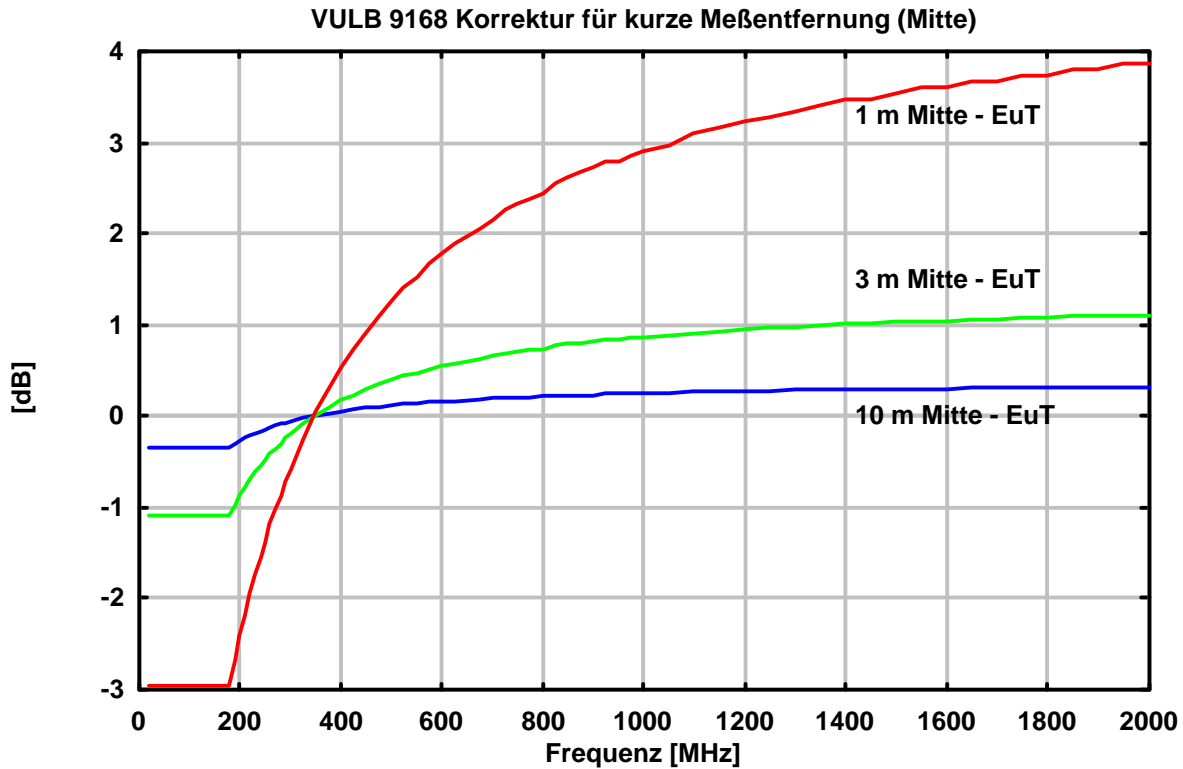

0 dB Referenz: Fernfeld-Daten

0 dB Reference: Farfield data