



Rev 2.3  
23.02.2015

## Aaronia EMC Bundles

Measurement Kits for straightforward pinpointing and measurement of interference sources

### References / examples of proof:

- ◆ EADS Deutschland GmbH, Unterschleissheim
- ◆ EnBW Kernkraftwerk GmbH, Neckarwestheim
- ◆ Siemens Healthcare, Marburg
- ◆ Universität Bern, Schweiz
- ◆ Universität Erlangen, Erlangen
- ◆ Freie Universität Berlin, Berlin
- ◆ Saarschmiede GmbH, Völklingen
- ◆ PEARL Agency GmbH, Buggingen
- ◆ Deutsches Elektronen-Synchotron DESY, Hamburg

### Included in delivery:

- ◆ Spectran NF-5030 (incl. Option 005)
- ◆ Spectran HF-60100 V4 (incl. Option 002, 020)
- ◆ HyperLOG 60100 antenna
- ◆ EMC ProbeSet PBS2 incl. preamplifier (EMC-Bundle 1&3)
- ◆ BicoLOG 30100E (EMC Bundle 2)
- ◆ BicoLOG 20100E (EMC Bundle 3)
- ◆ 2x Transport cases
- ◆ Cable & accessories



Made in Germany



# Specifications

## SPECTRAN® NF-5030

- ◆ Frequency range: 1Hz to 1MHz (optionally up to **30MHz**)
- ◆ Measurement range up to **DIN/VDE 0848**
- ◆ **65 MSPS**
- ◆ Typ. level range E-Field: 0,1V/m to **5kV/m\*\***
- ◆ Typ. level range H-Field: 1pT to **500µT\*\***
- ◆ Typ. level range Analog in: **200nV** to 200mV\*\*
- ◆ Typ. accuracy: 3%\*\*
- ◆ Superfast FFT spectrum analysis
- ◆ High-performance DSP (Digital Signal Processor)
- ◆ 3D magnetic field measurement
- ◆ DIN/VDE 0848 Exposure limit calculation
- ◆ Simultaneous M-Display X, Y, Z axes
- ◆ True RMS signal strength measurement
- ◆ USB 2.0 Interface



## SPECTRAN® HF-60100 V4

- ◆ Up to **100x faster SampleTime** as Rev.3
- ◆ Up to **80dB higher sensitivity** as Rev.3
- ◆ **14Bit Dual-ADC**
- ◆ **DDC Hardware-Filter**
- ◆ **150 MIPS DSP** (CPU)
- ◆ Frequency range: 1MHz to **9,4GHz**
- ◆ Max measurement range: -155dBm (1Hz)
- ◆ Max measurement range PreAmp: **-170dBm** (1Hz)
- ◆ AbsMax Level: +20dBm
- ◆ AbsMax Level: **+40dBm** (Option)
- ◆ Lowest possible SampleTime: **1mS**
- ◆ Typ. accuracy: +/- 1dB\*\*
- ◆ USB 2.0 Interface
- ◆ incl. HyperLOG 60100 EMC logper antenna

## BicoLOG 30100E (only EMC-Bundle 2)

- ◆ Design: Biconical Antenna
- ◆ Frequency range: **30MHz to 1GHz**
- ◆ Max. transmission power: 1W (30dBm or 0dBW)
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: **-31dBi** to 1dBi
- ◆ Antenna factor: **17-31dB/m**
- ◆ Calibration points: **194 (5MHz steps)**
- ◆ RF connection: SMA (female)
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1150gr
- ◆ **Warranty: 10 years**

## PBS2 Sniffer Set (only EMC-Bundle 1 and 3)

- ◆ Frequency range: **DC-6GHz**
- ◆ 5 Probes (50 Ohm SMB Connector):  
1x directional E-field probe, 4x magnetic field sniffer  
Pre-Amplifier noise (PBS2): 3.5dB typical
- ◆ PreAmplifier type/gain (PBS2):
- ◆ "linear" falloff. 1MHz: 40dB; 3GHz: 37.5dB; 6GHz: 35dB  
Dimensions of case (L/W/D): (300x190x70) mm
- ◆ Weight PBS2 (case incl. probes and pre-amplifier): 1500gr
- ◆ **Warranty: 10 years**

## BicoLOG 20100E (only EMC-Bundle 3)

- ◆ Design: Biconical Antenna
- ◆ Frequency range: **20MHz to 1GHz**
- ◆ Max. transmission power: 1W (30dBm or 0dBW)
- ◆ Nominal impedance: 50 Ohms
- ◆ Gain: **-38dBi** to 1dBi
- ◆ Antenna factor: **17-34dB/m**
- ◆ Calibration points: **196 (5MHz steps)**
- ◆ RF connection: SMA (female)
- ◆ Tripod socket: 1/4"
- ◆ Dimensions (L/W/D) : (540x225x225)mm
- ◆ Weight: 1150gr
- ◆ **Warranty: 10 years**


# Details

Our MEASUREMENT KIT for the EMC-PRO.


Our EMC kit allows for straightforward pinpointing and measurement of interference sources in electronic component groups as well as execution and monitoring of generic EMC measurement.

It is perfect for locating interference sources which might have been found e.g. in an EN55011, EN55022 or EN50371 (Class A or Class B) survey.

The EMC-Bundle 1 contains our highend spectrum analyzer models SPECTRAN NF-5030 (incl. Option 005), SPECTRAN HF-60100 V4 (incl. Option 002, 020), the HyperLOG 60100 antenna, our ProbeSet PBS2 (only EMC-Bundle 1&3) incl. PreAmp, BicoLOG 30100E (EMC-Bundle 2) or BicoLOG 20100E (EMC-Bundle 3) and lots of accessories and cables.

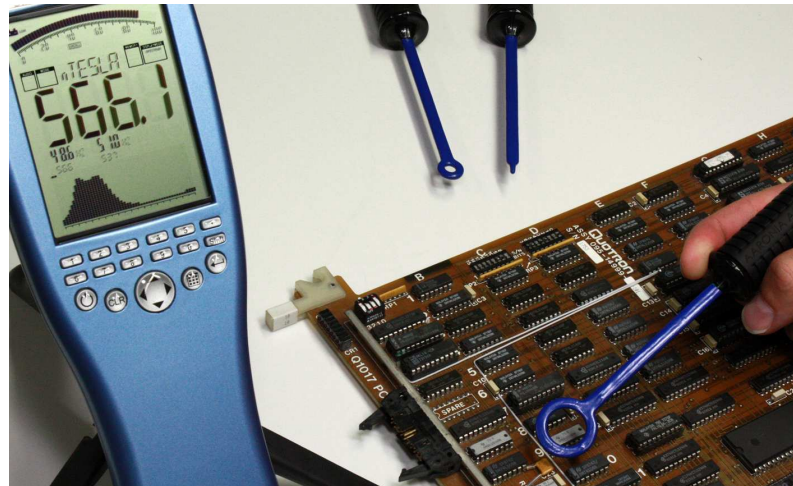

Magnetic field measurement on a group of components using the 60mm H-field probe

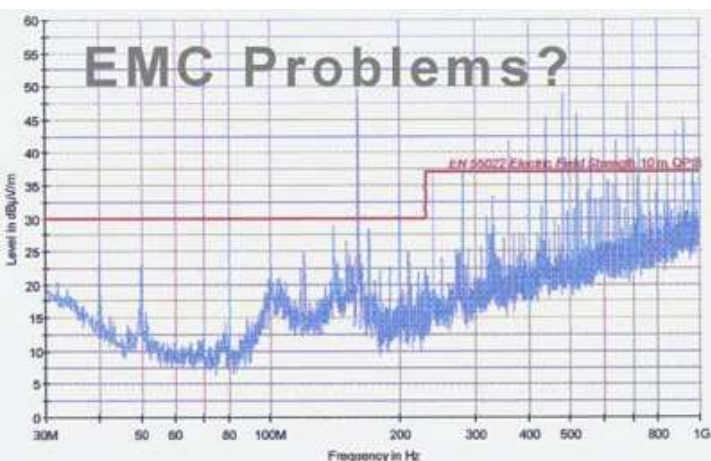

## EMC Problems?

This EN 55022 B survey discloses a multitude of problematic sources of interference. With the help of our EMC bundle, these emitters can easily be pinpointed and eliminated.

Our kit is especially suitable for:


- ◆ Pinpointing interference sources
- ◆ Estimation of interference field strength
- ◆ Verification of shielding and filtering measures
- ◆ Identifying faulty components
- ◆ Detecting circuitry overly sensitive to interference

Our probes are covered with an insulating layer, thus allowing safe measurement of oscillators or mains lines. The kit contains a high-performance pre-amplifier, allowing measurement of significantly weaker interference sources, boosting the sensitivity by up to 40dB.

After implementing appropriate changes in the circuit, their efficiency can easily and reliably be verified. That way, expensive and time-consuming re-assessments in an EMC laboratory can be skipped.

Verification of official EMC limits:


For example, should an interference source exceed an official EMC limit by 10dB, our kit can easily verify if a certain countermeasure succeeds in making the circuitry conforming again. This is another situation where the EMC kit can eliminate the need for expensive and time-consuming measurements in EMC laboratories.

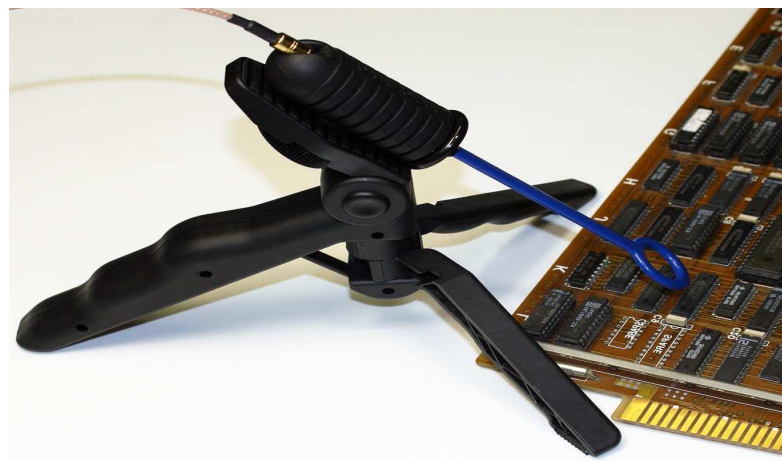


Pinpointing interference sources on a circuit board

# Frequency overview Analyzer & Antennas

## Frequency Overview SPECTRAN Spectrum Analyzer

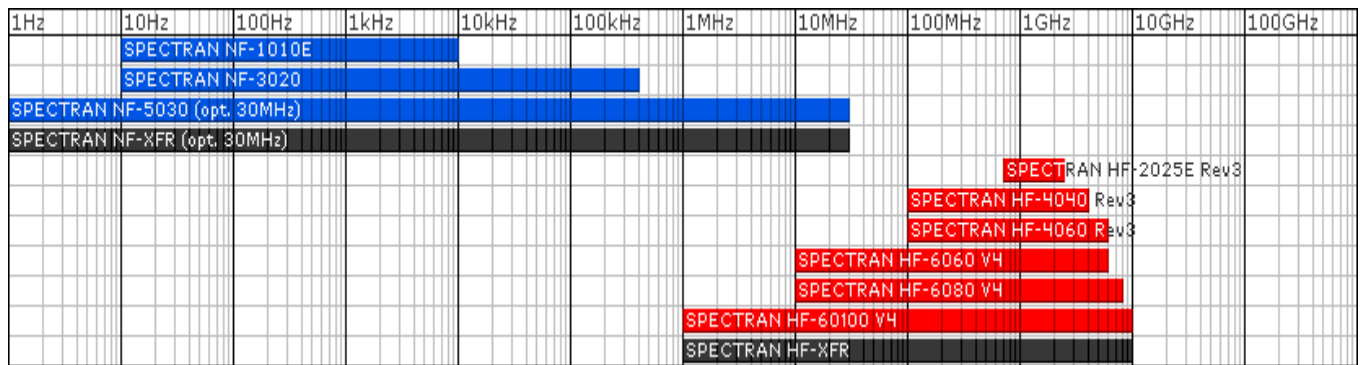

## Frequency Overview HyperLOG and BicoLOG Antennas and Probes

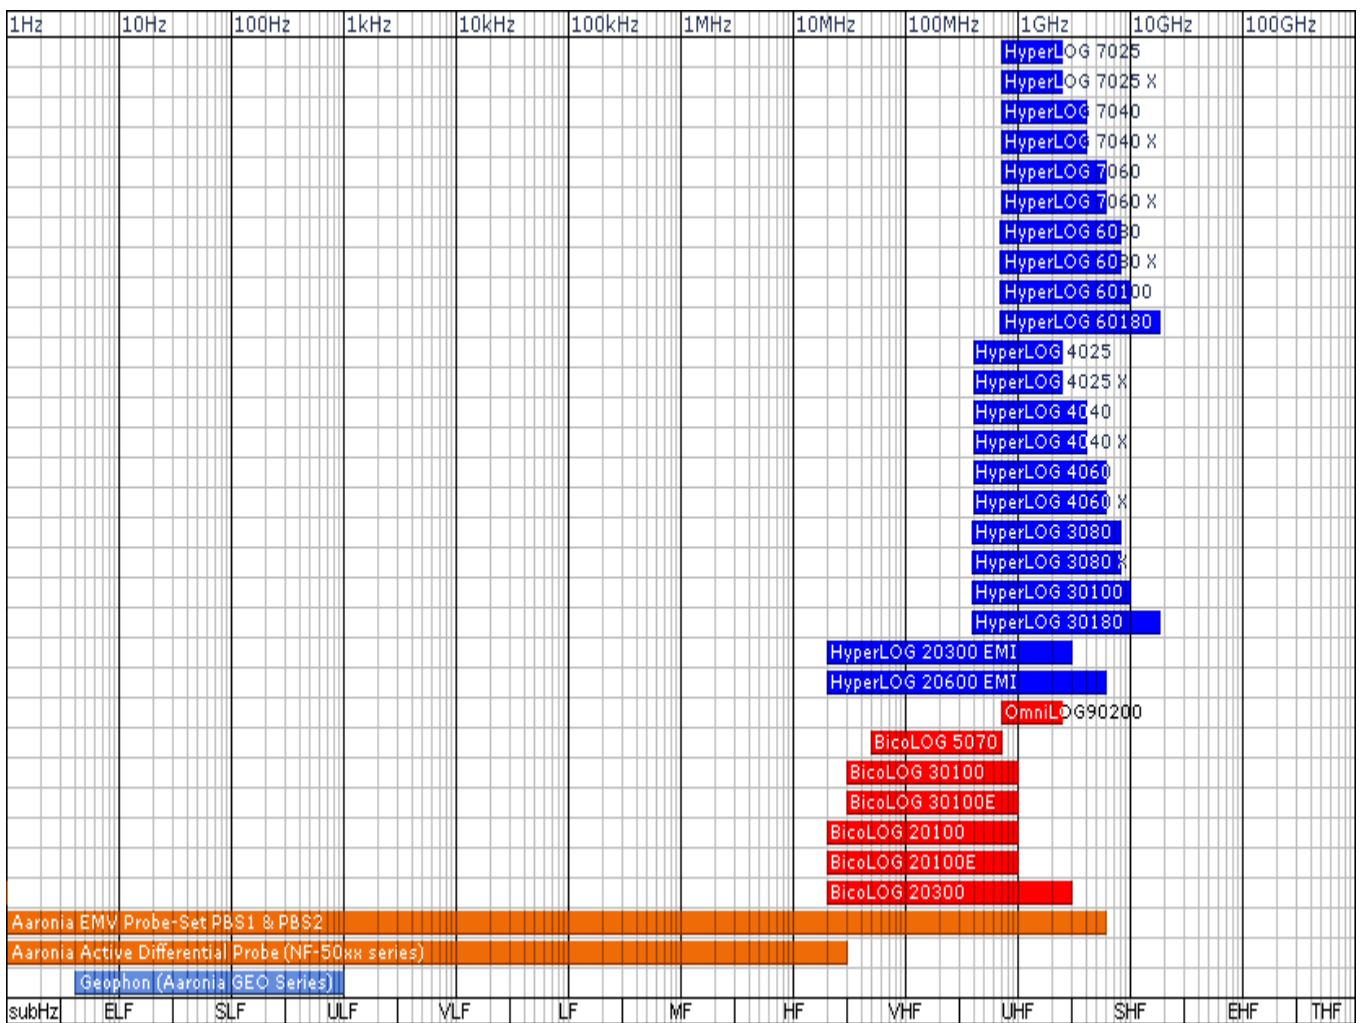

# References

## User of Aeronia Antennas and Spectrum Analyzers (Examples)

### Government, Military, Aeronautic, Astronautic

- ◆ NATO, Belgium
- ◆ Boeing, USA
- ◆ Airbus, Germany
- ◆ Bund (Bundeswehr), Germany
- ◆ Bundeswehr (Technische Aufklärung), Germany
- ◆ Lufthansa, Germany
- ◆ DLR (Deutsches Zentrum für Luft- und Raumfahrt, Germany)
- ◆ Eurocontrol (Flugüberwachung), Belgium
- ◆ Australian Government Department of Defence, Australia
- ◆ EADS (European Aeronautic Defence & Space Company) GmbH, Germany
- ◆ Institut für Luft- und Raumfahrtmedizin, Germany
- ◆ Deutscher Wetterdienst, Germany
- ◆ Polizeipräsidium, Germany
- ◆ Landesamt für Umweltschutz Sachsen-Anhalt, Germany
- ◆ Zentrale Polizeitechnische Dienste, Germany
- ◆ Bundesamt für Verfassungsschutz, Germany
- ◆ BEV (Bundesamt für Eich- und Vermessungswesen)

### Research/Development, Science and Universitys

- ◆ Deutsches Forschungszentrum für Künstliche Intelligenz, Germany
- ◆ University Freiburg, Germany
- ◆ Indonesien Institute of Sience, Indonesia
- ◆ Max-Planck-Institut für Polymerforschung, Germany
- ◆ Los Alamos National Labratory, USA
- ◆ University of Bahrain, Bahrain
- ◆ University of Florida, USA
- ◆ University Erlangen, Germany
- ◆ University Hannover, Germany
- ◆ University of Newcastle, United Kingdom
- ◆ University Strasbourg, France
- ◆ Universität Frankfurt, Germany
- ◆ University Munich, Germany
- ◆ Technical University Hamburg, Germany
- ◆ Max-Planck Institut für Radioastronomie, Germany
- ◆ Max-Planck-Institut für Quantenoptik, Germany
- ◆ Max-Planck-Institut für Kernphysik, Germany
- ◆ Max-Planck-Institut für Eisenforschung, Germany
- ◆ Forschungszentrum Karlsruhe, Germany

### Industry

- ◆ Shell Oil Company, USA
- ◆ ATI, USA
- ◆ Fedex, USA
- ◆ Walt Disney, Kalifornien, USA
- ◆ Agilent Technologies Co. Ltd., China
- ◆ Motorola, Brazil
- ◆ IBM, Switzerland
- ◆ Audi AG, Germany
- ◆ BMW, Germany
- ◆ Daimler Chrysler AG, Germany
- ◆ BASF, Germany
- ◆ Deutsche Bahn, Germany
- ◆ Deutsche Telekom, Germany
- ◆ Siemens AG, Germany
- ◆ Rohde & Schwarz, Germany
- ◆ Infineon, Austria
- ◆ Philips Technologie GmbH, Germany
- ◆ ThyssenKrupp, Germany
- ◆ EnBW, Germany
- ◆ RTL Television, Germany
- ◆ Pro Sieben – SAT 1, Germany
- ◆ Channel 6, United Kingdom
- ◆ WDR, Germany
- ◆ NDR, Germany
- ◆ SWR, Germany
- ◆ Bayerischer Rundfunk, Germany
- ◆ Carl-Zeiss-Jena GmbH, Germany
- ◆ Anritsu GmbH, Germany
- ◆ Hewlett Packard, Germany
- ◆ Robert Bosch GmbH, Germany
- ◆ Mercedes Benz, Austria
- ◆ EnBW Kernkraftwerk GmbH, Germany
- ◆ AMD, Germany
- ◆ Infineon Technologies, Germany
- ◆ Intel GmbH, Germany
- ◆ Philips Semiconductors, Germany
- ◆ Hyundai Europe, Germany
- ◆ Saarschmiede GmbH, Germany
- ◆ Wilkinson Sword, Germany
- ◆ IBM Deutschland, Germany
- ◆ Vattenfall, Germany
- ◆ Fraport, Germany



# Aaronia Distributors



**Aaronia USA**, 651 Amberton Crossing  
Suwanee, Georgia 30024 USA  
Phone ++1 678-714-2000, Fax ++1 678-714-2092  
Email: sales@aaroniausa.com  
URL: www.aaroniaUSA.com



**Aaronia North China**, Beijing Mesh Communication  
Tech Co. Ltd., No. 2 Huayuan Road, Building 2, Haidian  
District, 100191 Beijing, China  
Phone ++86 10 822 37 606, Fax ++86 10 822 37 609  
Email: sales@bjmesh.com  
URL: www.bjmesh.com.cn



**Aaronia South China**, Shenzhen TORI Wisdom  
Technology Co., Ltd, 3BRM, RD FL Luhua Technology  
Bldg, Guangxia Road 7, Futian, 518049 Shenzhen, China  
Phone ++86 755 888 580 86, Fax +86 755 830 73 418  
Email: mail@aaronia-china.com  
URL: www.aaronia-china.com



**E-Instrument Tech Ltd.**, No. 16, Lane 37  
Guanye E. Riad, Pingchen City,  
324587 Taoyuan County, Taiwan  
Phone: +886 3 4576 809 Fax: +886 3 468 8611  
Email: sales@e-channel.com.tw  
URL: www.e-channel.com.tw



**Testpribor**, Fabriciusa St. 30  
Moscow 125363 Russia  
Phone ++7 495-225-67-37  
Email: testpribor@test-expert.ru  
URL: www.test-expert.ru



**EgeRate Elektronik Muh. ve Tic. Ltd. Sti.**,  
Perpa Ticaret Merkezi, A Blok Kat: 5 No: 141,  
Sisli / Istanbul, Turkey  
Phone ++90 212 220 3483, Fax ++90 212 220 7635  
Email: info@egerate.com  
URL: www.egerate-store.com



**Aimil Ltd**, B-906, BSEL Tech Park, Opp. Vashi Rly Strn,  
400705 Vashi, Navi Mumbai, India  
Phone ++91 22 3918 3554, Fax ++91 22 3918 3562  
Email: sanjayagarwal@aimil.com  
URL: www.aimil.com



**EKKON SA**, Paraná 350, Capital Federal,  
1017 Buenos Aires, Argentina  
Phone ++ 54 114 123 009 1, Fax ++54 114 372 324 4  
Email: info@aaronia-argentina.com.ar  
URL: www.aaronia-argentina.com.ar



**Mono Tech Ltd**, 2 Johanan Hasandlar St.  
44641 Kfar-Sava, Israel  
Phone ++972 72 2500 290, Fax ++972 9 7654 264  
Email: kobi@aaronia.co.il  
URL: www.aaronia.co.il



**Tagor Electronic doo**  
Tihomira Brankovica 21  
18000 Nis, Serbia  
Phone ++381 18 575 545, Fax ++381 18 217 125  
Email: miodrag.stojilkovic@tagor.rs  
URL: www.tagor-instrumenti.rs



**NDN**, Janowskiego 15  
02-784 Warszawa, Poland  
Phone ++48 22 641 1547, Fax ++48 22 641 1547  
Email: ndn@ndn.com.pl  
URL: www.ndn.com.pl



**VECTOR Technologies Ltd**, 40 Diogenous str., 15234  
Halandri, Greece  
Phone ++30 210 685 8008, Fax ++30 210 6858 8118  
Email: info@vectortechnologies.gr  
URL: www.vectortechnologies.gr



Made in Germany

Aaronia AG, Gewerbegebiet Aaronia AG, DE-54597 Strickscheid, Germany  
Phone ++49(0)6556-93033, Fax ++49(0)6556-93034  
Email: mail@aaronia.de URL: www.aaronia.com

**Spectran®** **HyperLOG®** **BicoLOG®** **OmniLOG®** **Aaronia-Shield®** **Aaronia X-Dream®** **MagnoShield®** **IsoLOG®**

are registered trademarks of Aaronia AG